

S1, S2 CONNECTORS



1 = – VOLTAGE
2 = + VOLTAGE
3 = SHIELD
4 = GROUND

mini fast.


TERMINAL BLOCK PLUGS




1 = – VOLTAGE
2 = + VOLTAGE
3 = SHIELD
4 = GROUND

SPECIFICATIONS


HOUSING MATERIAL/COLOR	NYLON 66 – 33% GLASS FILLED/BLACK
RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
CONTACT CARRIERS/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	300 V
OPERATING CURRENT	9.0 A MINIFAST, 8 A TERMINAL BLOCK
PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	–30°C to +80°C (–22°F to +176°F)

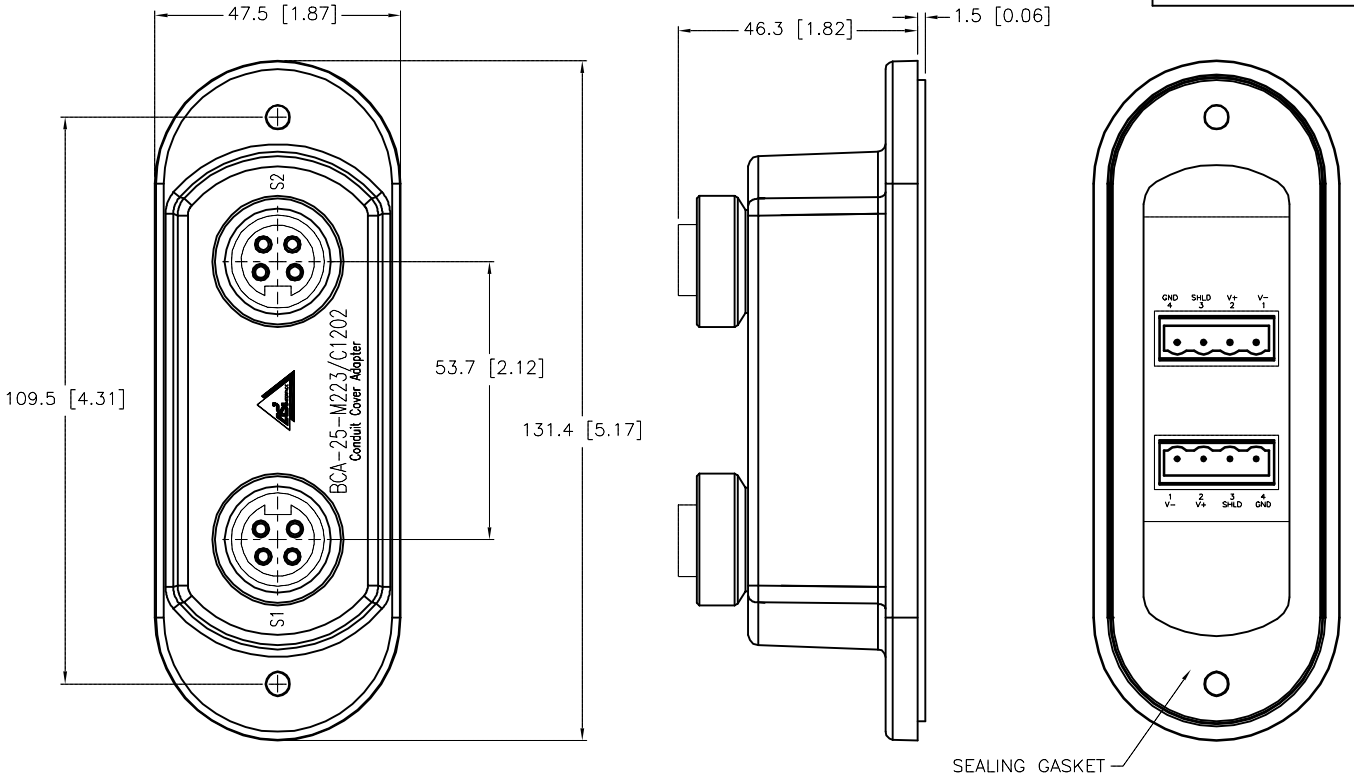


WIRING DIAGRAM

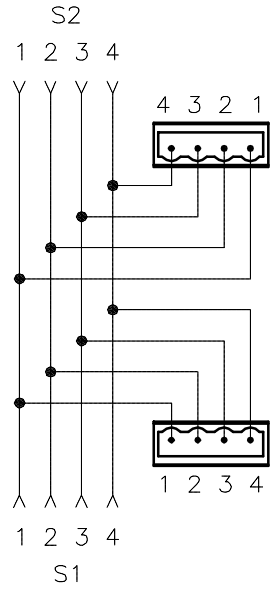


COVER SCREWS INCLUDED



FORM 8 CONDUIT BODIES:
10–24 SCREWS



MARK 9 CONDUIT BODIES:
8–32 SCREWS



TERMINAL BLOCKS INCLUDED

NOTES:

1. "/C1202" DESIGNATES ASI CONDUIT ADAPTER WITH HART WIRING LABEL (10267118).

= 90° CORDSET CABLE DIRECTION

SOURCE DRAWING – FOR REFERENCE ONLY

REV	DESCRIPTION	BY	DATE	ECO NO.
D	ADDED THICKER GASKET	RDS	09/12/13	42993

RELATED DOCUMENTS
1.
2.
3.
4.

MATERIAL

FINISH

3RD ANGLE PROJECTION

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK INC
High Technology Sensors and Automation Controls
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1–800–544–7769
(763) 553–7300
(763) 553–0708 fax
turck.com

DRFT	RDS
APVD	
DATE	05/24/05
SCALE	1=1.5

UNIT OF MEASUREMENT
MILLIMETER [INCH]
DO NOT SCALE THIS DRAWING

DESCRIPTION
BCA–25–M223/C1202

IDENTIFICATION NO.
U8633–1202

REV
D

FILE: U8633–1202

SHEET 1 OF 1

Approved 09/20/2013, work order #46099 by J.S.