
FEMALE END VIEW




1 = WHITE/ORANGE (+TX)
2 = WHITE/GREEN (+RX)
3 = ORANGE (−TX)
4 = GREEN (−RX)

euro fast. Ethernet


SPECIFICATIONS

HOUSING MATERIAL/COLOR	NYLON 66 – 33% GLASS FILLED/BLACK
RECEPTACLE HOUSING MAT'L/FINISH	STAINLESS STEEL/PASSIVATED
CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	40 V
OPERATING CURRENT	4 A
WIRE TERMINATION METHOD	110 PUNCH DOWN BLOCKS (IDC)
PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	−30°C to +80°C (−22°F to +176°F)

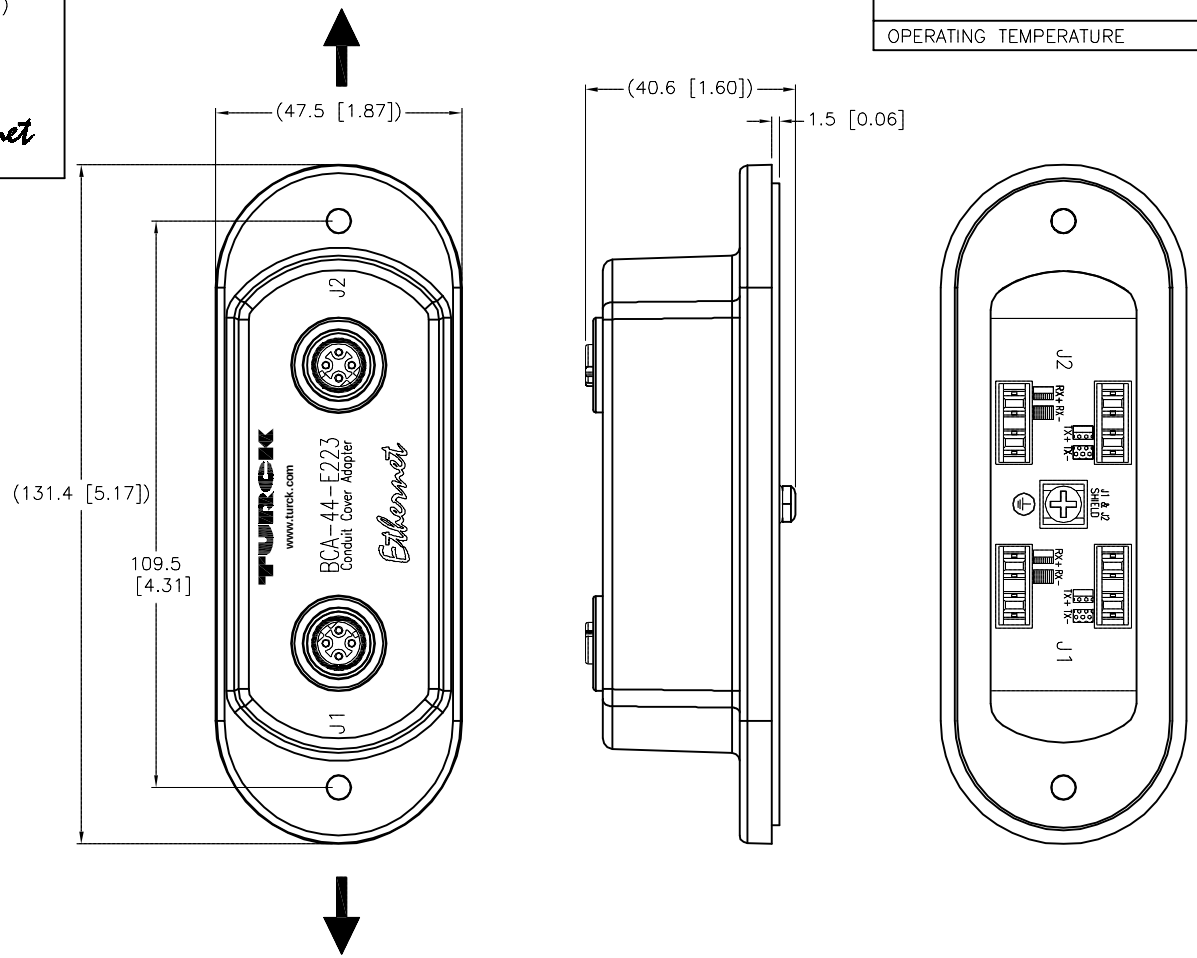


SOURCE DRAWING - FOR REFERENCE ONLY

COVER SCREWS INCLUDED



FORM 8 CONDUIT BODIES:
10–24 SCREWS



MARK 9 CONDUIT BODIES:
8–32 SCREWS

= 90° CORDSET CABLE DIRECTION

REV	DESCRIPTION	BY	DATE	ECO NO.
B	ADD THICKER GASKET	RDS	09/12/13	42993

RELATED DOCUMENTS
1.
2.
3.
4.

MATERIAL

FINISH

3RD ANGLE PROJECTION

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK INC
High Technology Sensors and Automation Controls
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
turck.com

DRFT RDS | DATE 11/10/11
APVD D.E. | SCALE 1=1.5

UNIT OF MEASUREMENT
MILLIMETER [INCH]
DO NOT SCALE THIS DRAWING

DESCRIPTION
BCA-44-E223

IDENTIFICATION NO. U3-00832 | REV B

FILE: U3-00832 | SHEET 1 OF 1

Approved 09/20/2013, work order #46099 by J.S.