

J1 CONNECTOR



1 = – VOLTAGE
2 = + VOLTAGE
3 = SHIELD
4 = GROUND

mini fast

TERMINAL BLOCK PLUGS




V– V+ SHLD GND


1 = – VOLTAGE
2 = + VOLTAGE
3 = SHIELD
4 = GROUND

SPECIFICATIONS


HOUSING MATERIAL/COLOR	NYLON 66 – 33% GLASS FILLED/BLACK
RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
CONTACT CARRIERS/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	300 V
OPERATING CURRENT	9.0 A MINIFAST, 8 A TERMINAL BLOCK
PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	–30°C to +80°C (–22°F to +176°F)

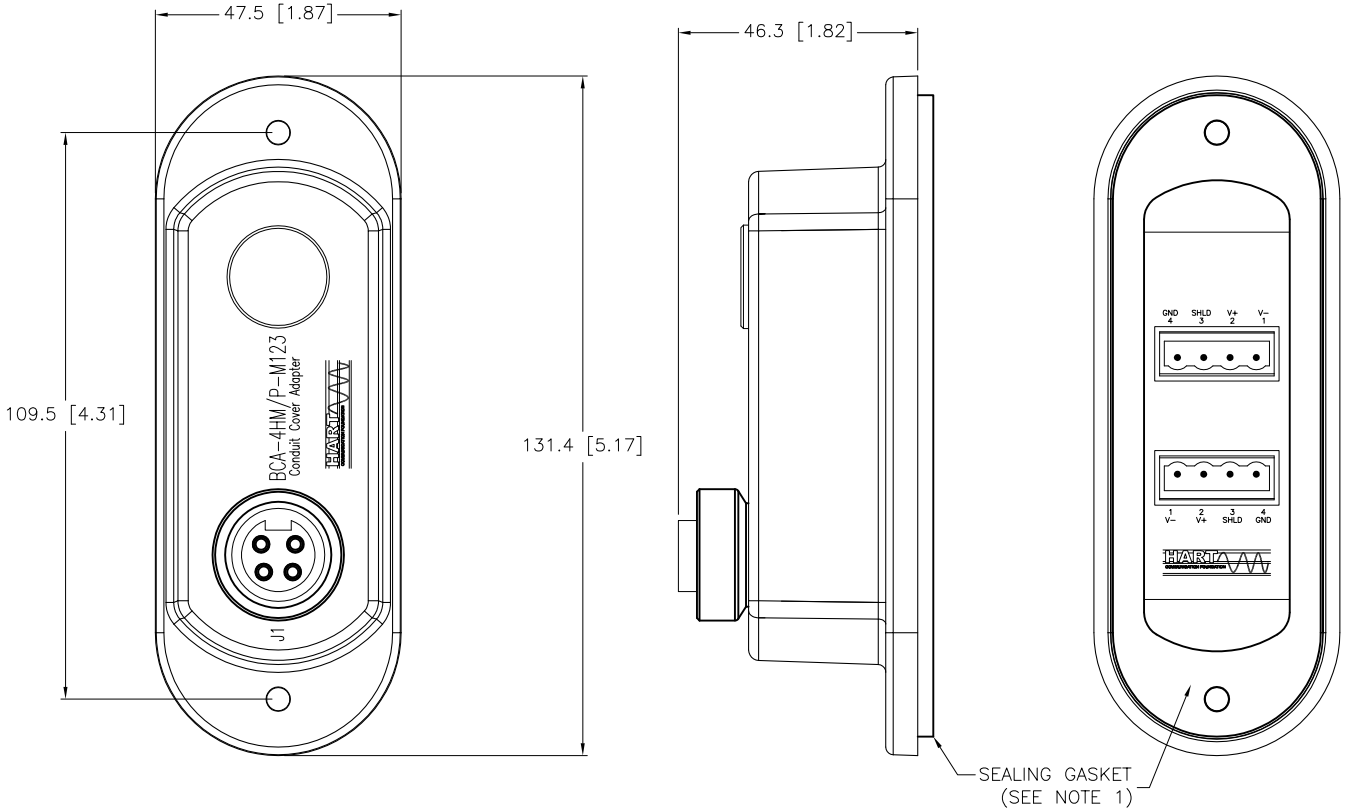


WIRING DIAGRAM

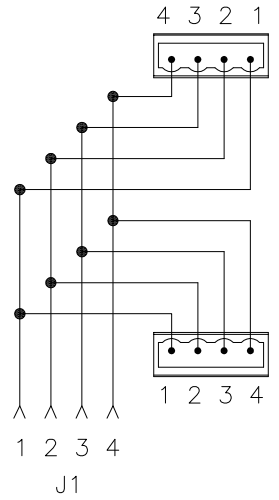


COVER SCREWS INCLUDED



FORM 8 CONDUIT BODIES:
10–24 SCREWS



MARK 9 CONDUIT BODIES:
8–32 SCREWS



TERMINAL BLOCKS INCLUDED

NOTES:

1. "/P" INDICATES SPECIAL GASKET FOR PVC COATED CONDUIT BODIES.

SOURCE DRAWING - FOR REFERENCE ONLY

REV	DESCRIPTION	BY	DATE	ECO NO.
D	UPDATE MOUNTING HOLE DIMENSION	CK	04/29/11	34946

RELATED DOCUMENTS
1.
2.
3.
4.

3RD ANGLE PROJECTION

THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK INC
High Technology Sensors and Automation Controls
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1–800–544–7769
(763) 553–7300
(763) 553–0708 fax
turck.com

MATERIAL

FINISH

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DRFT RDS | DATE 08/25/03
DSGN DF | SCALE 1=1.5

UNIT OF MEASUREMENT
MILLIMETER [INCH]
DO NOT SCALE THIS DRAWING

DESCRIPTION
BCA–4HM/P–M123

IDENTIFICATION NO.
U8917–0013

REV
D

FILE: U8917–0013

SHEET 1 OF 1