
## J1, J2 CONNECTORS





1 = SHIELD
2 = + VOLTAGE
3 = – VOLTAGE
4 = CAN_H
5 = CAN_L

euro fast.

DeviceNet™


## TERMINAL BLOCK PLUGS





1 = V–
2 = CAN_L
3 = DRAIN
4 = CAN_H
5 = V+

## SPECIFICATIONS


| | |
|---|---|
| HOUSING MATERIAL/COLOR | NYLON 66 – 33% GLASS FILLED/BLACK |
| RECEPTACLE HOUSING MATERIAL/FINISH | STAINLESS STEEL/PASSIVATED |
| CONTACT CARRIERS/COLOR | PA 12/BLUE–GREY |
| CONTACT MATERIAL/PLATING | BRASS/GOLD |
| OPERATING VOLTAGE | 40 V |
| OPERATING CURRENT | 4 A |
| OPTIONAL TERMINATOR RESISTOR | 1 OF 2 SWITCHES IN "ON" POSITION |
| PROTECTION CLASS to DIN 40050 | IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED |
| OPERATING TEMPERATURE | –30°C to +80°C (–22°F to +176°F) |

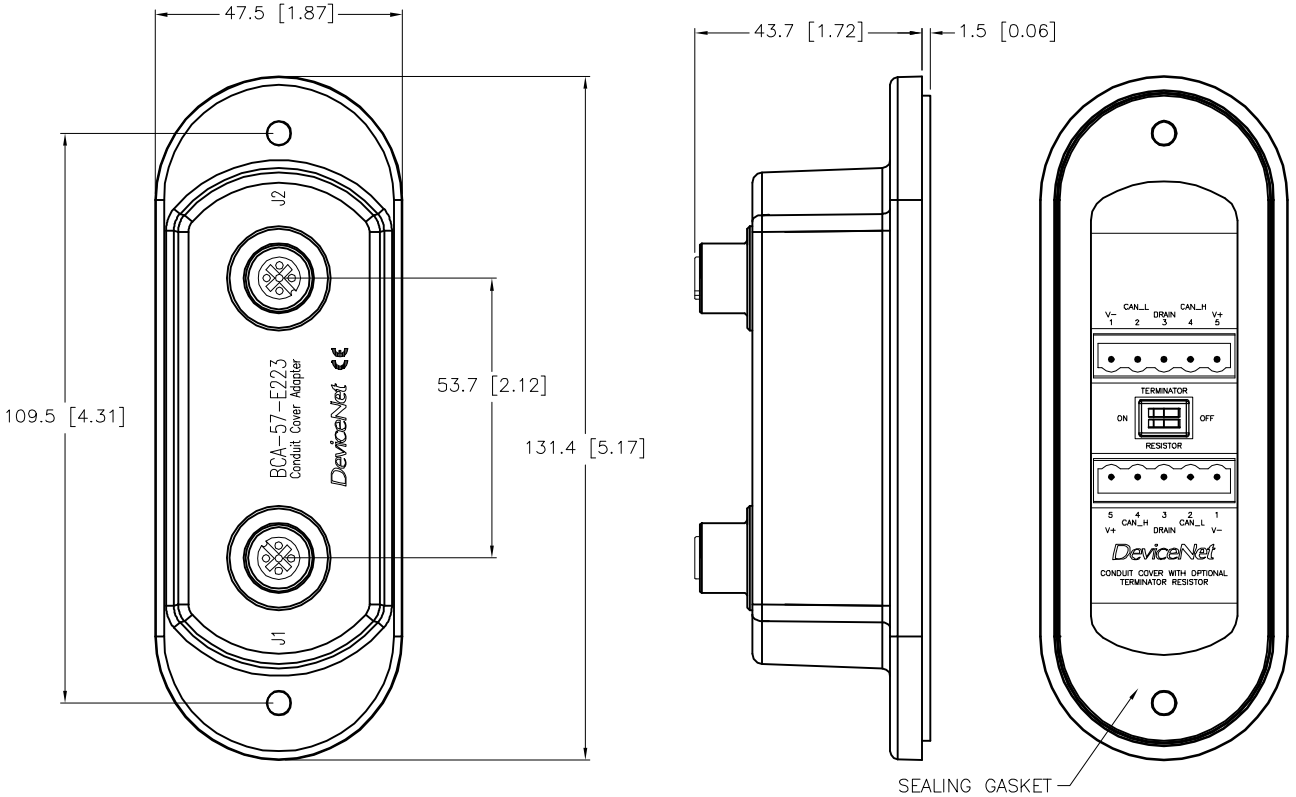



## WIRING DIAGRAM

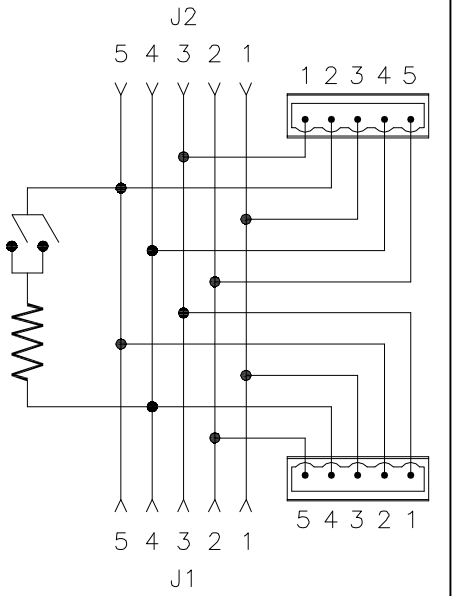



## COVER SCREWS INCLUDED



FORM 8 CONDUIT BODIES:
10–24 SCREWS



MARK 9 CONDUIT BODIES:
8–32 SCREWS



TERMINAL PLUGS INCLUDED

**SOURCE DRAWING – FOR REFERENCE ONLY**

| REV | DESCRIPTION | BY | DATE | ECO NO. |
|---|---|---|---|---|
| E | ADD CE TO CLICHE | KB | 08/19/26 | 500000012977 |

RELATED DOCUMENTS
1.
2.
3.
4.

MATERIAL

FINISH

3RD ANGLE PROJECTION

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1–800–544–7769
(763) 553–7300
(763) 553–0708 fax
www.turck.us

DRFT RDS | DATE 04/26/02
APVD DF | SCALE 1=1.5

UNIT OF MEASUREMENT
**MILLIMETER [ INCH ]**
DO NOT SCALE THIS DRAWING

DESCRIPTION
BCA–57–E223

IDENTIFICATION NO. U8699–2 | REV E

FILE: U8699–2 | SHEET 1 OF 1