
J1 CONNECTORS




1 = DRAIN
2 = + VOLTAGE
3 = – VOLTAGE
4 = CAN_H
5 = CAN_L

mini fast.

DeviceNet™

TERMINAL BLOCK PLUGS





1 = – VOLTAGE
2 = CAN_L
3 = DRAIN
4 = CAN_H
5 = + VOLTAGE


DeviceNet™

SPECIFICATIONS

HOUSING MATERIAL/COLOR	NYLON 66 – 33% GLASS FILLED/BLACK
RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
CONTACT CARRIERS/COLOR	TPU/BLUE
CONTACT MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	40 V
OPERATING CURRENT	8 A
OPTIONAL TERMINATOR RESISTOR	1 OF 2 SWITCHES IN "ON" POSITION
PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	–40°C to +70°C (–40°F to +158°F)

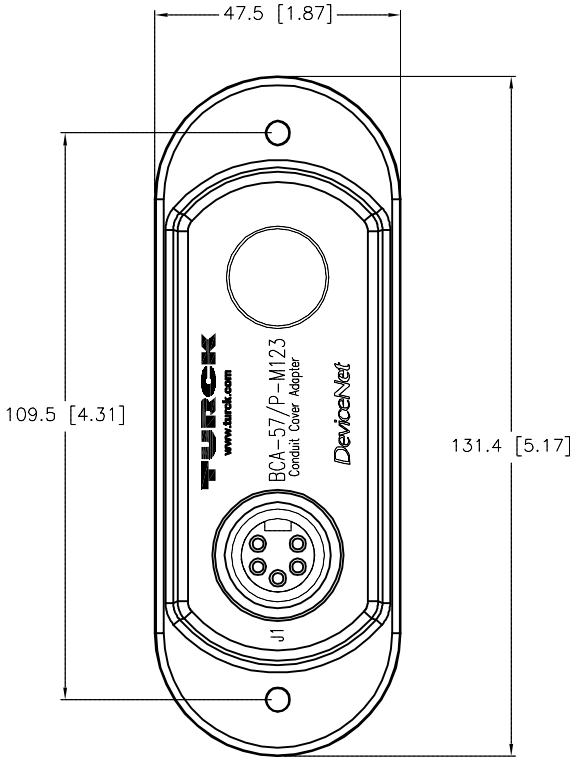


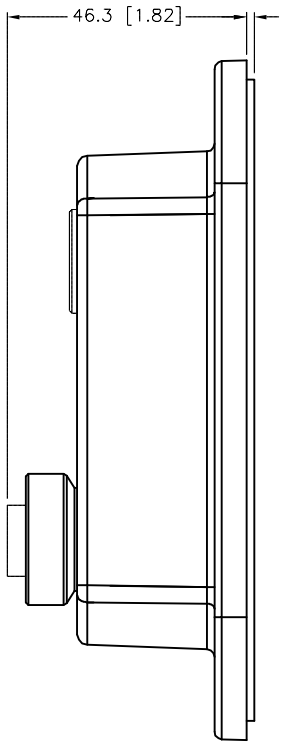


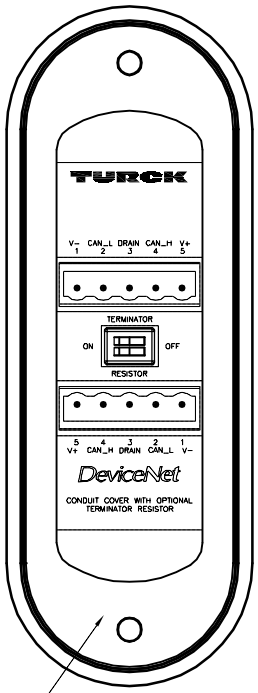


SEALING GASKET

WIRING DIAGRAM

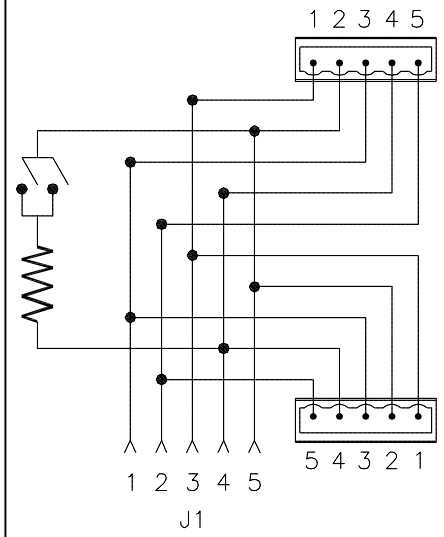




COVER SCREWS INCLUDED



FORM 8 CONDUIT BODIES:
10–24 SCREWS



MARK 9 CONDUIT BODIES:
8–32 SCREWS

NOTES:

1. "/P" INDICATES SPECIAL GASKET FOR PVC COATED CONDUIT BODIES AND NYLON COVER SCREWS.

SOURCE DRAWING – FOR REFERENCE ONLY

REV	DESCRIPTION	BY	DATE	ECO NO.
A	DRAWING RELEASE	TV	03/14/16	

RELATED DOCUMENTS
1.
2.
3.
4.

3RD ANGLE PROJECTION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK INC
High Technology Sensors and Automation Controls
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1–800–544–7769
(763) 553–7300
(763) 553–0708 fax
turck.com

MATERIAL

FINISH

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DRFT TV | DATE 03/04/16
APVD N.G. | SCALE 1=1.5

UNIT OF MEASUREMENT
MILLIMETER [INCH]
DO NOT SCALE THIS DRAWING

DESCRIPTION
BCA–57/P–M123

IDENTIFICATION NO.
U2–26688

REV
A

FILE: U2–26688

SHEET 1 OF 1

Approved 03/14/2016, work order #99495 by N.G.