
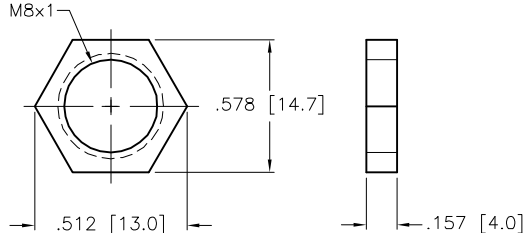
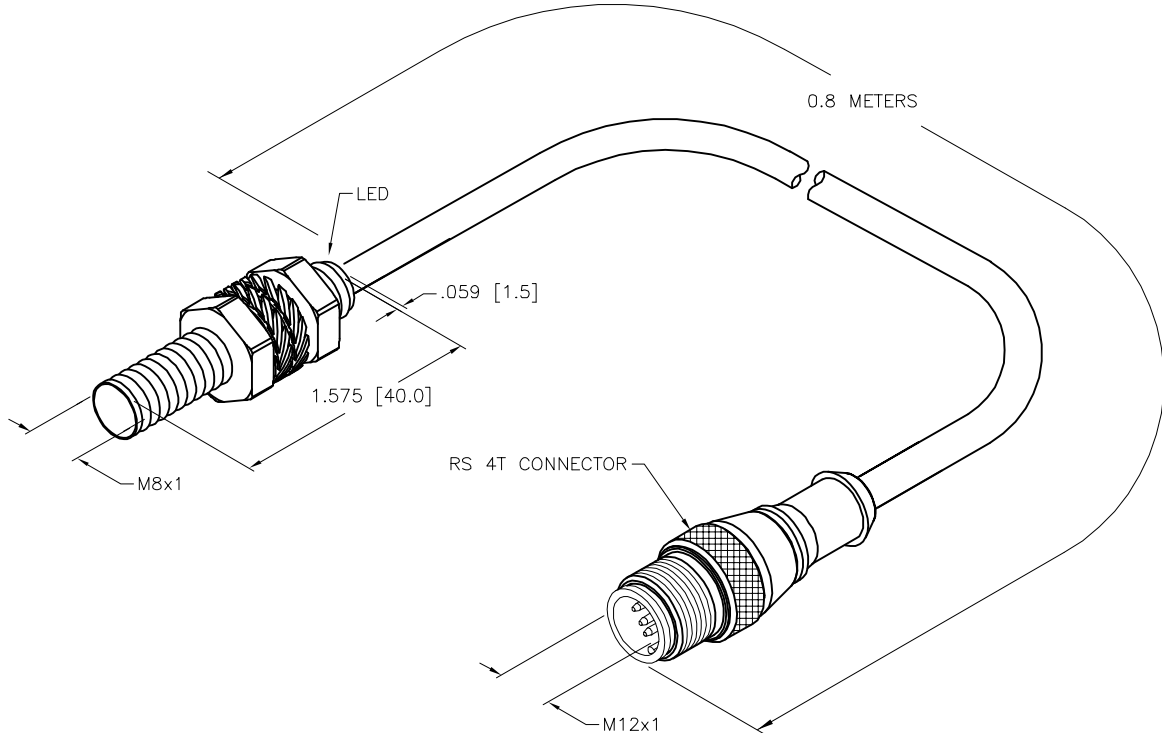





WIRING DIAGRAM		LOCKNUT LN-SS08		SPECIFICATIONS																																																					
 OUTPUT: AP6X SHORT-CIRCUIT AND OVERLOAD PROTECTED				<table><tr><td>RATED OPERATING DISTANCE</td><td>2.0 mm = .079" (NOMINAL)</td></tr><tr><td>MOUNTING MODE</td><td>FLUSH</td></tr><tr><td>MIN. REPEAT ACCURACY</td><td>≤ 2%</td></tr><tr><td>TEMPERATURE DRIFT</td><td>≤ ±10%</td></tr><tr><td>HYSTERESIS</td><td>20%</td></tr><tr><td>OPERATING TEMPERATURE</td><td>-25°C to +100°C (-13°F to +212°F)</td></tr><tr><td>RATED OPERATIONAL VOLTAGE</td><td>10-30 VDC</td></tr><tr><td>RIPPLE</td><td>≤10%</td></tr><tr><td>RATED OPERATIONAL CURRENT (DC)</td><td>≤150 mA</td></tr><tr><td>NO-LOAD CURRENT</td><td>≤ 15 mA</td></tr><tr><td>RESIDUAL CURRENT</td><td>≤ 0.1 mA</td></tr><tr><td>RATED INSULATION VOLTAGE</td><td>≤ 0.5 kV</td></tr><tr><td>SHORT-CIRCUIT PROTECTED</td><td>YES</td></tr><tr><td>MAX VOLTAGE DROP</td><td>≤ 1.8 V</td></tr><tr><td>WIRE BREAKAGE PROTECTION</td><td>INCORPORATED</td></tr><tr><td>REVERSE POLARITY PROTECTION</td><td>INCORPORATED</td></tr><tr><td>OUTPUT FUNCTION</td><td>3-WIRE, NORMALLY OPEN, PNP</td></tr><tr><td>MAX. SWITCHING FREQUENCY</td><td>≤ 3.0 kHz</td></tr><tr><td>HOUSING MATERIAL</td><td>STAINLESS STEEL, 1.4305 (AISI 303)</td></tr><tr><td>ACTIVE FACE MATERIAL</td><td>PLASTIC, PA6.6</td></tr><tr><td>END CAP MATERIAL</td><td>PLASTIC, PP</td></tr><tr><td>CABLE</td><td>ø3mm, Lif12Y33Y, TPE, GRAY</td></tr><tr><td>SHOCK RESISTANCE</td><td>30 g, 11 ms</td></tr><tr><td>VIBRATION RESISTANCE</td><td>55 Hz, 1 mm AMPLITUDE (IN ALL 3 PLANES)</td></tr><tr><td>DEGREE OF PROTECTION</td><td>IP67</td></tr><tr><td>SWITCHING STATUS INDICATION</td><td>LED: YELLOW</td></tr></table>		RATED OPERATING DISTANCE	2.0 mm = .079" (NOMINAL)	MOUNTING MODE	FLUSH	MIN. REPEAT ACCURACY	≤ 2%	TEMPERATURE DRIFT	≤ ±10%	HYSTERESIS	20%	OPERATING TEMPERATURE	-25°C to +100°C (-13°F to +212°F)	RATED OPERATIONAL VOLTAGE	10-30 VDC	RIPPLE	≤10%	RATED OPERATIONAL CURRENT (DC)	≤150 mA	NO-LOAD CURRENT	≤ 15 mA	RESIDUAL CURRENT	≤ 0.1 mA	RATED INSULATION VOLTAGE	≤ 0.5 kV	SHORT-CIRCUIT PROTECTED	YES	MAX VOLTAGE DROP	≤ 1.8 V	WIRE BREAKAGE PROTECTION	INCORPORATED	REVERSE POLARITY PROTECTION	INCORPORATED	OUTPUT FUNCTION	3-WIRE, NORMALLY OPEN, PNP	MAX. SWITCHING FREQUENCY	≤ 3.0 kHz	HOUSING MATERIAL	STAINLESS STEEL, 1.4305 (AISI 303)	ACTIVE FACE MATERIAL	PLASTIC, PA6.6	END CAP MATERIAL	PLASTIC, PP	CABLE	ø3mm, Lif12Y33Y, TPE, GRAY	SHOCK RESISTANCE	30 g, 11 ms	VIBRATION RESISTANCE	55 Hz, 1 mm AMPLITUDE (IN ALL 3 PLANES)	DEGREE OF PROTECTION	IP67	SWITCHING STATUS INDICATION	LED: YELLOW
RATED OPERATING DISTANCE	2.0 mm = .079" (NOMINAL)																																																								
MOUNTING MODE	FLUSH																																																								
MIN. REPEAT ACCURACY	≤ 2%																																																								
TEMPERATURE DRIFT	≤ ±10%																																																								
HYSTERESIS	20%																																																								
OPERATING TEMPERATURE	-25°C to +100°C (-13°F to +212°F)																																																								
RATED OPERATIONAL VOLTAGE	10-30 VDC																																																								
RIPPLE	≤10%																																																								
RATED OPERATIONAL CURRENT (DC)	≤150 mA																																																								
NO-LOAD CURRENT	≤ 15 mA																																																								
RESIDUAL CURRENT	≤ 0.1 mA																																																								
RATED INSULATION VOLTAGE	≤ 0.5 kV																																																								
SHORT-CIRCUIT PROTECTED	YES																																																								
MAX VOLTAGE DROP	≤ 1.8 V																																																								
WIRE BREAKAGE PROTECTION	INCORPORATED																																																								
REVERSE POLARITY PROTECTION	INCORPORATED																																																								
OUTPUT FUNCTION	3-WIRE, NORMALLY OPEN, PNP																																																								
MAX. SWITCHING FREQUENCY	≤ 3.0 kHz																																																								
HOUSING MATERIAL	STAINLESS STEEL, 1.4305 (AISI 303)																																																								
ACTIVE FACE MATERIAL	PLASTIC, PA6.6																																																								
END CAP MATERIAL	PLASTIC, PP																																																								
CABLE	ø3mm, Lif12Y33Y, TPE, GRAY																																																								
SHOCK RESISTANCE	30 g, 11 ms																																																								
VIBRATION RESISTANCE	55 Hz, 1 mm AMPLITUDE (IN ALL 3 PLANES)																																																								
DEGREE OF PROTECTION	IP67																																																								
SWITCHING STATUS INDICATION	LED: YELLOW																																																								
																																																									
NOTES: 1. "/S100" DESIGNATES HIGH RATED OPERATING TEMPERATURE OF +100°C.				SOURCE DRAWING - FOR REFERENCE ONLY																																																					
<table><tr><td>B</td><td>UPDATE SPECS</td><td>RDS</td><td>02/08/21</td><td>76481</td></tr><tr><td>REV</td><td>DESCRIPTION</td><td>BY</td><td>DATE</td><td>ECO NO.</td></tr></table>		B	UPDATE SPECS	RDS	02/08/21	76481	REV	DESCRIPTION	BY	DATE	ECO NO.	<table><tr><td>RELATED DOCUMENTS</td><td>3RD ANGLE PROJECTION</td><td>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</td><td colspan="2">3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</td></tr><tr><td>1. 2. 3. 4.</td><td></td><td rowspan="2">ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION</td><td colspan="2">TURCK</td></tr><tr><td>MATERIAL</td><td>SEE NOTES</td><td colspan="2">DESCRIPTION BI2-EG08-AP6X-0.8-RS4T/S100</td></tr><tr><td>FINISH</td><td>SEE NOTES</td><td>DRFT ER APVD A.F.</td><td>DATE 06/14/19 SCALE 1=1.0</td><td>IDENTIFICATION NO. 100015730</td></tr><tr><td colspan="2"></td><td colspan="2">UNIT OF MEASUREMENT INCH [MILLIMETER] DO NOT SCALE THIS DRAWING</td><td>REV B</td></tr></table>		RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		1. 2. 3. 4.		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	TURCK		MATERIAL	SEE NOTES	DESCRIPTION BI2-EG08-AP6X-0.8-RS4T/S100		FINISH	SEE NOTES	DRFT ER APVD A.F.	DATE 06/14/19 SCALE 1=1.0	IDENTIFICATION NO. 100015730			UNIT OF MEASUREMENT INCH [MILLIMETER] DO NOT SCALE THIS DRAWING		REV B	<table><tr><td colspan="2">FILE: 100015730</td><td>SHEET 1 OF 1</td></tr></table>		FILE: 100015730		SHEET 1 OF 1															
B	UPDATE SPECS	RDS	02/08/21	76481																																																					
REV	DESCRIPTION	BY	DATE	ECO NO.																																																					
RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us																																																						
1. 2. 3. 4.		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	TURCK																																																						
MATERIAL	SEE NOTES		DESCRIPTION BI2-EG08-AP6X-0.8-RS4T/S100																																																						
FINISH	SEE NOTES	DRFT ER APVD A.F.	DATE 06/14/19 SCALE 1=1.0	IDENTIFICATION NO. 100015730																																																					
		UNIT OF MEASUREMENT INCH [MILLIMETER] DO NOT SCALE THIS DRAWING		REV B																																																					
FILE: 100015730		SHEET 1 OF 1																																																							