


BID2-H12F-AP6-0.7-RS4/S90-S100



Inductive Sensor – For High Pressures

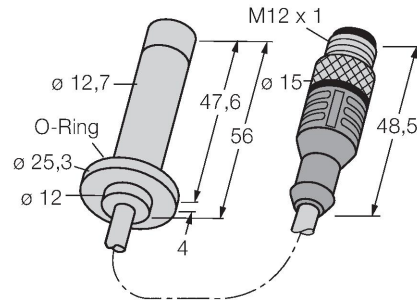

Features

- Smooth barrel, Ø 12 mm
- Metal, chrome-plated brass
- admissible static or dynamic pressure 100 bar
- DC 3-wire, 10...30 VDC
- NO contact, PNP output
- Pigtail with male end M12 x 1

Wiring diagram



Technical data

Type	BID2-H12F-AP6-0.7-RS4/S90-S100
ID	100015820
Special version	S90-S100 Corresponds to: PUR cable Maximum ambient temperature = 100 °C
General data	
Rated switching distance	2 mm
Mounting conditions	Flush
Secured operating distance	≤ (0.81 × S _n) mm
Correction factors	St37 = 1; Al = 0.3; stainless steel = 0.7; Ms = 0.4
Repeat accuracy	≤ 2 % of full scale
Static pressure	≤ 100 bar
Dynamic pressure	≤ 100 bar
Permissible contact medium	electrically conductive
Temperature drift	≤ ±10 %
Hysteresis	3...15 %
Electrical data	
Operating voltage U _B	10...30 VDC
Ripple U _{rs}	≤ 10 % U _{Bmax}
DC rated operating current I _B	≤ 200 mA
No-load current	≤ 15 mA
Residual current	≤ 0.1 mA
Isolation test voltage	0.5 kV
Short-circuit protection	yes/Cyclic
Voltage drop at I _B	≤ 1.8 V

Functional principle

Inductive sensors detect metal objects contactless and wear-free. For this purpose they use a high-frequency electromagnetic AC field that interacts with the target. The sensors hosting a ferrite core coil generate the AC field through an LC resonant circuit. Pressure-resistant inductive sensors withstand high pressures which makes them perfectly suited for position control in hydraulic cylinders.

Technical data

Wire break/reverse polarity protection	yes/Complete
Output function	3-wire, NO contact, PNP
Switching frequency	1 kHz
Mechanical data	
Design	Smooth barrel, 12.7 mm
Dimensions	56 mm
Housing material	Metal, CuZn, Chrome-plated
Active area material	Stainless steel, 1.4305 (AISI 303)
End cap	Plastic, EPTR
Material coupling nut	metal, CuZn, nickel-plated
Electrical connection	Cable with connector, M12 × 1
Cable quality	Ø 5.2 mm, LifYY-11Y, PUR, 0.7 m
Core cross-section	3 x 0.34 mm ²
Environmental conditions	
Ambient temperature	-25...+100 °C
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP67

Mounting instructions

Mounting instructions/Description	
	Distance D2 x B
	Distance W3 x Sn
	Distance T3 x B
	Distance S1.5 x B
	Distance G6 x Sn
	Diameter active area BØ 12 mm

BID2-H12F-AP6-0.7-RS4/S90-S100 | 10/31/2025 17-38 | technical changes reserved