



FEMALE END VIEW (J1)	FEMALE END VIEW (J2)
	
1 = ORANGE 2 = WHITE/ORANGE 3 = GREEN 4 = WHITE/GREEN 5 = BROWN 6 = N/C 7 = N/C 8 = N/C 9 = N/C	1 = N/C 2 = GREEN 3 = ORANGE 4 = WHITE/ORANGE 5 = BROWN 6 = WHITE/GREEN 7 = N/C 8 = N/C 9 = N/C

SPECIFICATIONS	
RATED CURRENT [A]	2.0 A
RATED VOLTAGE [V]	60 V
OUTER CABLE JACKET MATERIAL/COLOR	TPE/TEAL
CONDUCTOR INSULATION MATERIAL	HDPE
NUMBER OF CONDUCTORS [AWG]	4x24 AWG, STRANDED, CAT 5e
SHIELDING	ALUM./POLYESTER FOIL AND TINNED COPPER BRAID
TEMPERATURE RANGE	−40°C to +80°C (−40°F to +176°F)

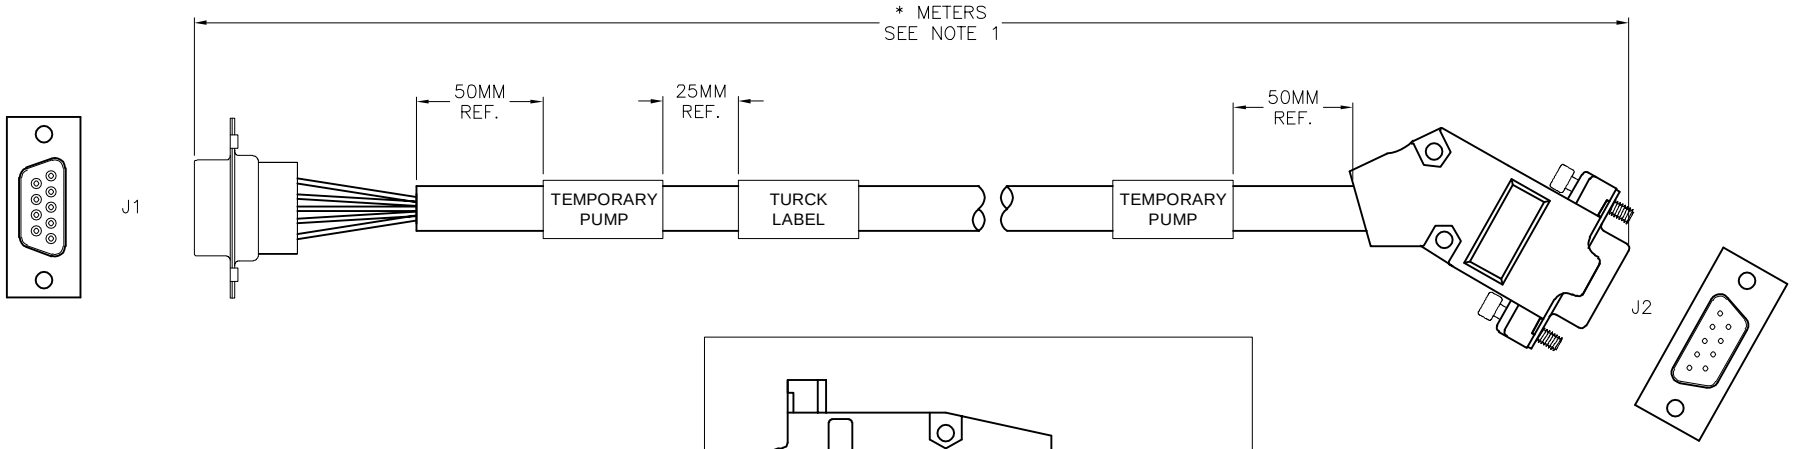

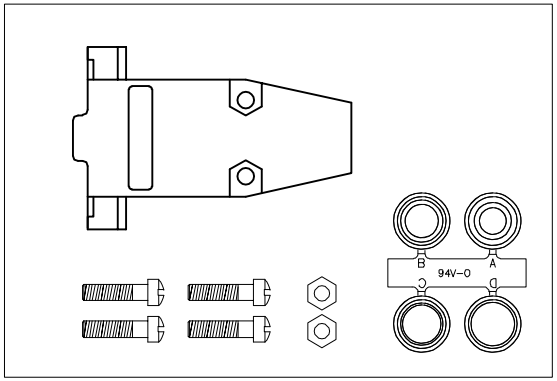

SOURCE DRAWING - FOR REFERENCE ONLY

CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH − 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	**TOLERANCE ***
0−7mm	±0.5mm
8−29mm	±1.0mm
30−49mm	±2.0mm
50−69mm	±3.0mm
70−100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH.

2. "/S3308" DESIGNATES: DO NOT INSTALL CONNECTOR HOOD. SUPPLY HOOD AND HARDWARE SEPARATELY. CABLE LABEL BOTH ENDS "TEMPORARY PUMP".

REV	DESCRIPTION	BY	DATE	ECO NO.
B	UPDATE SOURCE	KB	04/23/25	500000011154

RELATED DOCUMENTS
1.
2.
3.
4.

3RD ANGLE PROJECTION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1−800−544−7769
(763) 553−7300
(763) 553−0708 fax
www.turck.us

MATERIAL

FINISH

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DRFT TV | DATE 05/09/16
APVD E.S. | SCALE 1=1.3

UNIT OF MEASUREMENT
MILLIMETER [INCH]
DO NOT SCALE THIS DRAWING

DESCRIPTION
DE9S DE9S45 441−*M/S3308

IDENTIFICATION NO.

REV B

FILE: 777037356

SHEET 1 OF 1