IO-Link Starterkit

Technical data

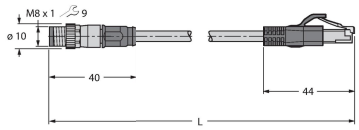
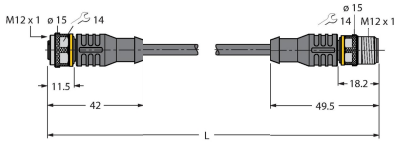
Type	IO-Link Starterkit
Ident. no.	100012813
Included in delivery	Carrying case, black/yellow Bottom lining, black, 248 x 182 x 33 mm, account assigned Cover profile foam, black, 248 x 182 x 21 mm 1:2 Plug-in power supply, 24 VDC 0.5 A Type 512692 — NA with M8 female connector 8-GB USB stick with software set IO-Link master TBEN-S2-4IOL (6814024) Ethernet cable PSGS4M-RJ45S-4414-1M (6933004) Connection cable RKC4T-2-RSC4T/TXL (6625604) I/O hub TBIL-S4-8DXP (100002596) Inductive sensor BI10U-M18-IOL6X2-H1141 (1644875) Ultrasonic sensor RU40U-M18M-AP8X2-H1151 (1610094) Indicator light K50L2RGBKQ (3802158)




Features

- Complete set including IO-Link master, IO-Link sensors, I/O hub, parameterization software and accessories

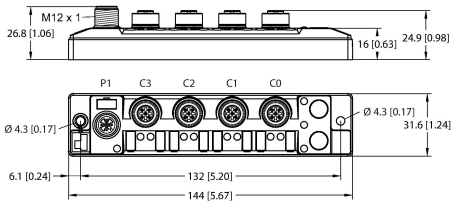


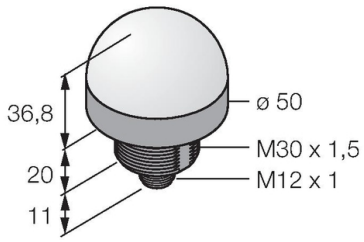
Accessories

Dimension drawing	Type	Ident. no.	
	**PSGS4M-RJ45S-4414-1M**	**6933004**	Cable for Industrial Ethernet, extension cable, M8 male to RJ45 male, straight, 4-pin, cable length: 1 m, jacket material: PUR, green; CAT 5E acc. to ISO/IEC 11801, EN 50173, EIA/TIA 568-A; other cable lengths and types available, see www.turck.com
	**RKC4T-2-RSC4T/TXL**	**6625604**	Extension cable, M12 female, straight, 3-pin to M12 male, straight, 3-pin; cable length: 2 m, jacket material: PUR, black; cULus approval; other cable lengths and qualities available, see www.turck.com

Accessories

Dimension drawing	Type	Ident. no.	
	**TBEN-S2-4IOL**	**6814024**	Compact multiprotocol I/O module, 4 IO-Link Master 1.1 Class A, 4 universal PNP digital channels 0.5 A

IO-Link Starterkit| 06-04-2020 09-46 | Technical modifications reserved

Dimension drawing	Type	Ident. no.	
	**TBIL-S4-8DXP**	**100002596**	8-channel I/O hub for the connection of 8 digital PNP signals to an IO-Link master (input/output freely selectable per channel)
	**BI10U-M18-IOL6X2-H1141**	**1644875**	Inductive sensor, cylindrical; threaded barrel; 18 mm; chrome-plated brass
	**RU40U-M18M-AP8X2-H1151**	**1610094**	Ultrasonic sensor; cylindrical, threaded barrel; 18 mm; nickel-plated brass
	**K50L2RGBKQ**	**3802158**	RGB LED indicators