
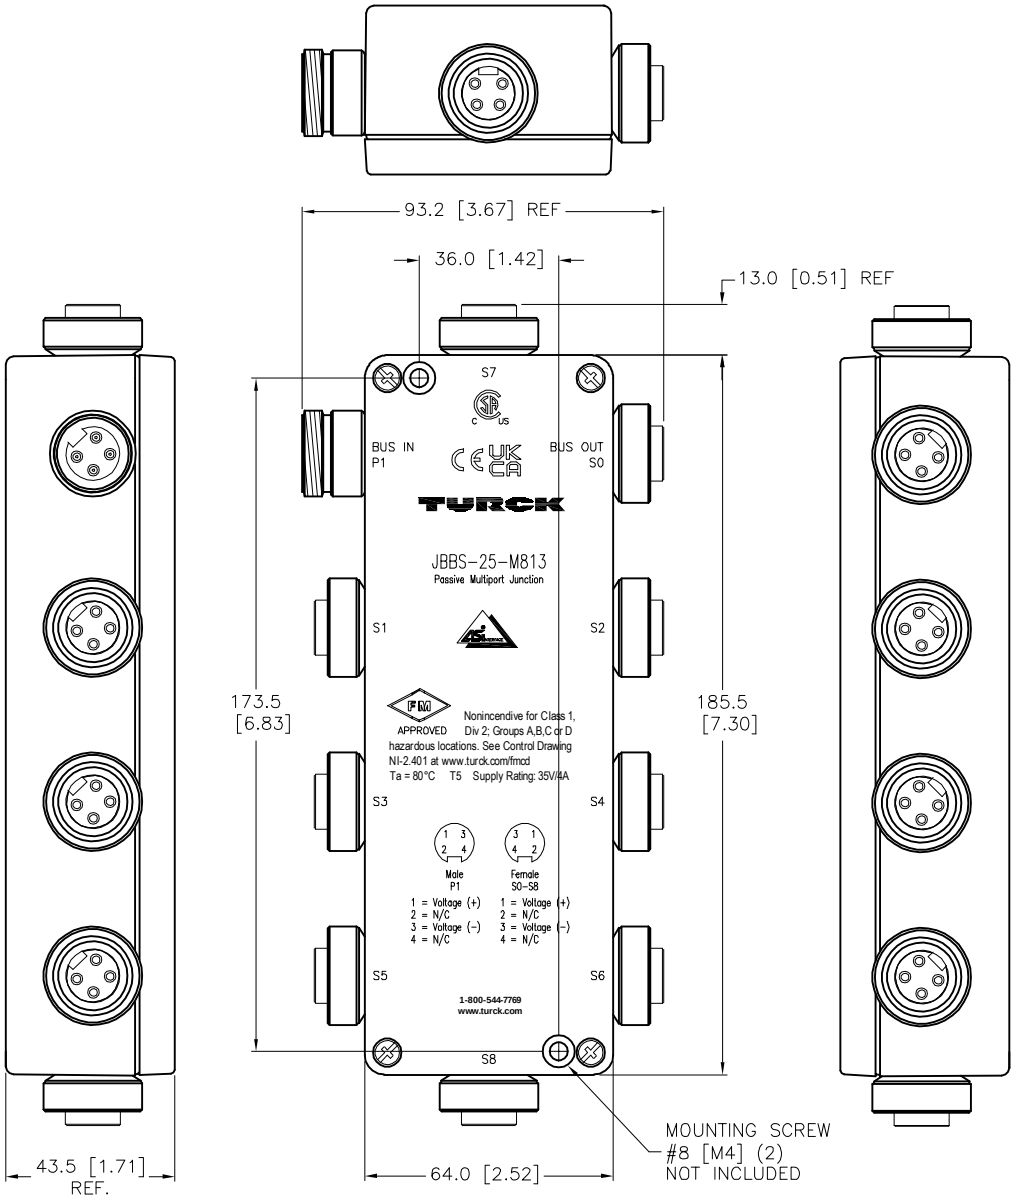



SPECIFICATIONS	
HOUSING MATERIAL	DIE–CAST ALUMINUM ALLOY
HOUSING FINISH/COLOR	POWDER COAT/BLACK
RECEPTACLE HOUSING MAT'L/FINISH	STAINLESS STEEL/PASSIVATED
CONTACT CARRIERS MATERIAL	TPU
CONTACTS	BRASS/GOLD
OPERATING VOLTAGE	300 V
OPERATING CURRENT	9.0 A PER CONDUCTOR
PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	–40°C to +70°C (–40°F to +158°F)

P1 CONNECTOR




1 = + VOLTAGE
2 = N/C
3 = – VOLTAGE
4 = N/C

S0–S8 CONNECTORS




1 = + VOLTAGE
2 = N/C
3 = – VOLTAGE
4 = N/C

WIRING DIAGRAM

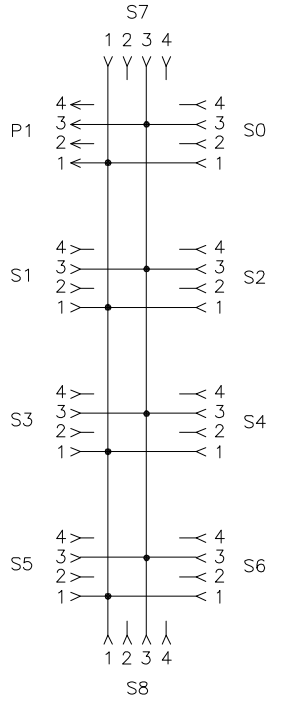

SOURCE DRAWING - FOR REFERENCE ONLY

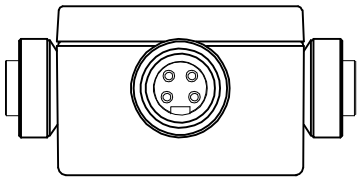

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1–800–544–7769 (763) 553–7300 (763) 553–0708 fax www.turck.us
1. 2. 3. 4.				
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT RWC	DATE 07/11/07	DESCRIPTION JBBS–25–M813
		APVD	SCALE 1=2.0	
FINISH	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT **MILLIMETER [INCH]** DO NOT SCALE THIS DRAWING		IDENTIFICATION NO. U3–00958 REV E
				FILE: U3–00958 SHEET 1 OF 1

REV	DESCRIPTION	BY	DATE	ECO NO.
E	ADD CE/UKCA TO CLICHE	TR	08/17/22	500000006082