
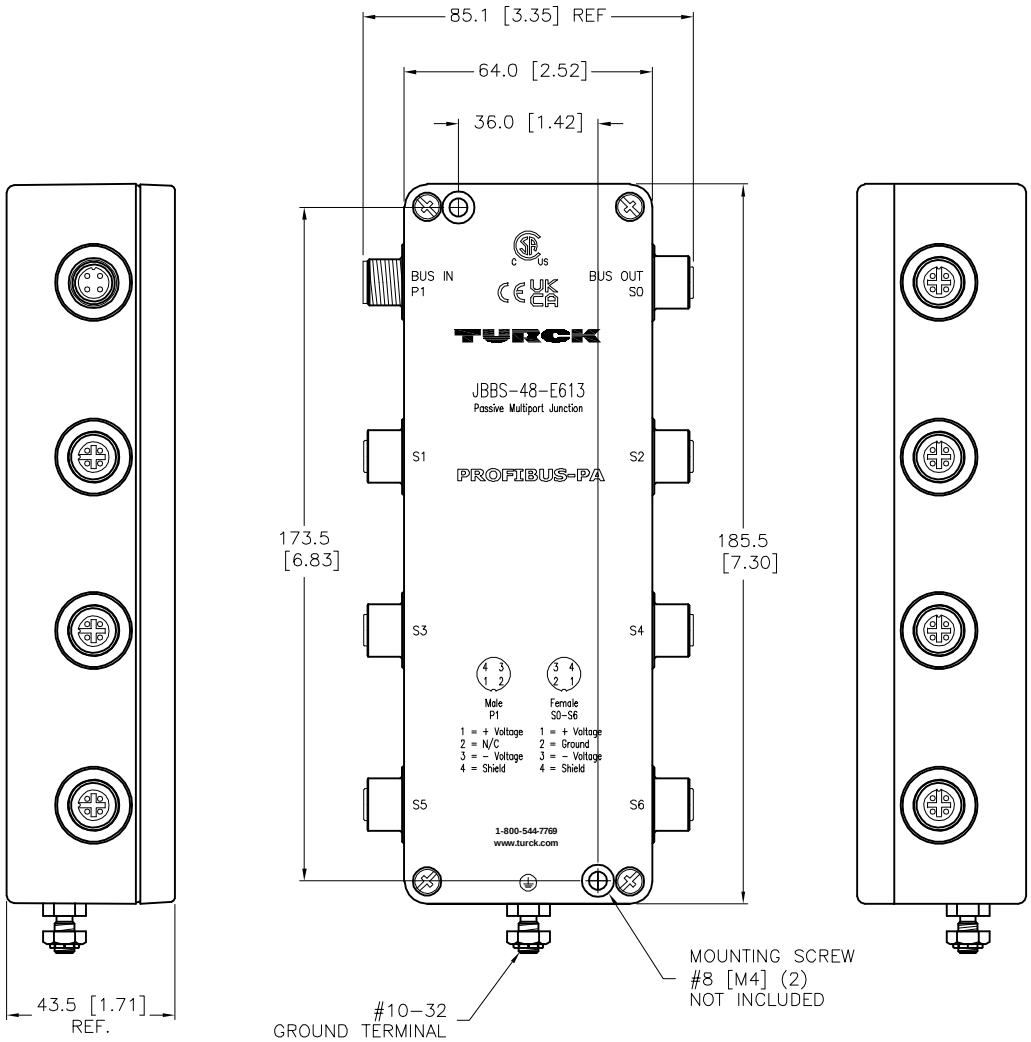



| SPECIFICATIONS | |
|---|---|
| HOUSING MATERIAL | DIE-CAST ALUMINUM ALLOY |
| HOUSING FINISH/COLOR | POWDER COAT/BLACK |
| RECEPTACLE HOUSING MAT'L/FINISH | STAINLESS STEEL/PASSIVATED |
| CONTACT CARRIERS/COLOR | PA 12 NYLON/BLACK |
| CONTACTS MATERIAL/PLATING | BRASS/GOLD |
| OPERATING VOLTAGE | 300 V |
| OPERATING CURRENT | 4.0 A PER CONDUCTOR |
| PROTECTION CLASS to DIN 40050 | IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED |
| OPERATING TEMPERATURE | -40°C to 80°C (-40°F to 176°F) |


P1 CONNECTOR




1 = + VOLTAGE
2 = N/C
3 = - VOLTAGE
4 = SHIELD

euro fast. **PROFIBUS-PA**


S0-S6 CONNECTORS




1 = + VOLTAGE
2 = GROUND
3 = - VOLTAGE
4 = SHIELD

euro fast. **PROFIBUS-PA**

WIRING DIAGRAM

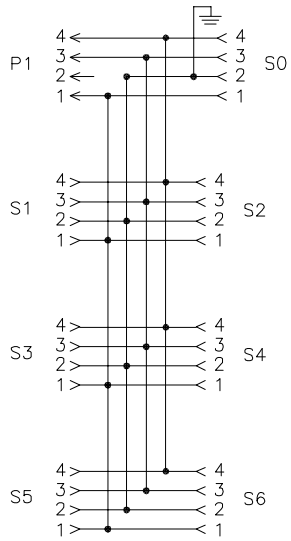


**SOURCE DRAWING - FOR REFERENCE ONLY**

| REV | DESCRIPTION | BY | DATE | ECO NO. |
|---|---|---|---|---|
| E | ADD CE-UKCA MARK TO CLICHE | RDS | 08/18/22 | 500000006082 |

RELATED DOCUMENTS
1.
2.
3.
4.

3RD ANGLE PROJECTION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.


TURCK
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us


MATERIAL

FINISH

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DRFT IK | DATE 11/28/00
APVD DF | SCALE 1=2.0

UNIT OF MEASUREMENT
**MILLIMETER [ INCH ]**
DO NOT SCALE THIS DRAWING

DESCRIPTION
JBBS-48-E613

IDENTIFICATION NO.
U0215-486

REV
E

FILE: U0215-486

SHEET 1 OF 1