

SPECIFICATIONS	
HOUSING MATERIAL	FIBERGLASS
HOUSING FINISH/COLOR	POWDER COAT/BLACK
RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
CONTACT CARRIERS/COLOR	TPU/BLACK
CONTACTS MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	300 V
OPERATING CURRENT	9.0 A PER CONDUCTOR
PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	–40°C to +70°C (–40°F to +158°F)

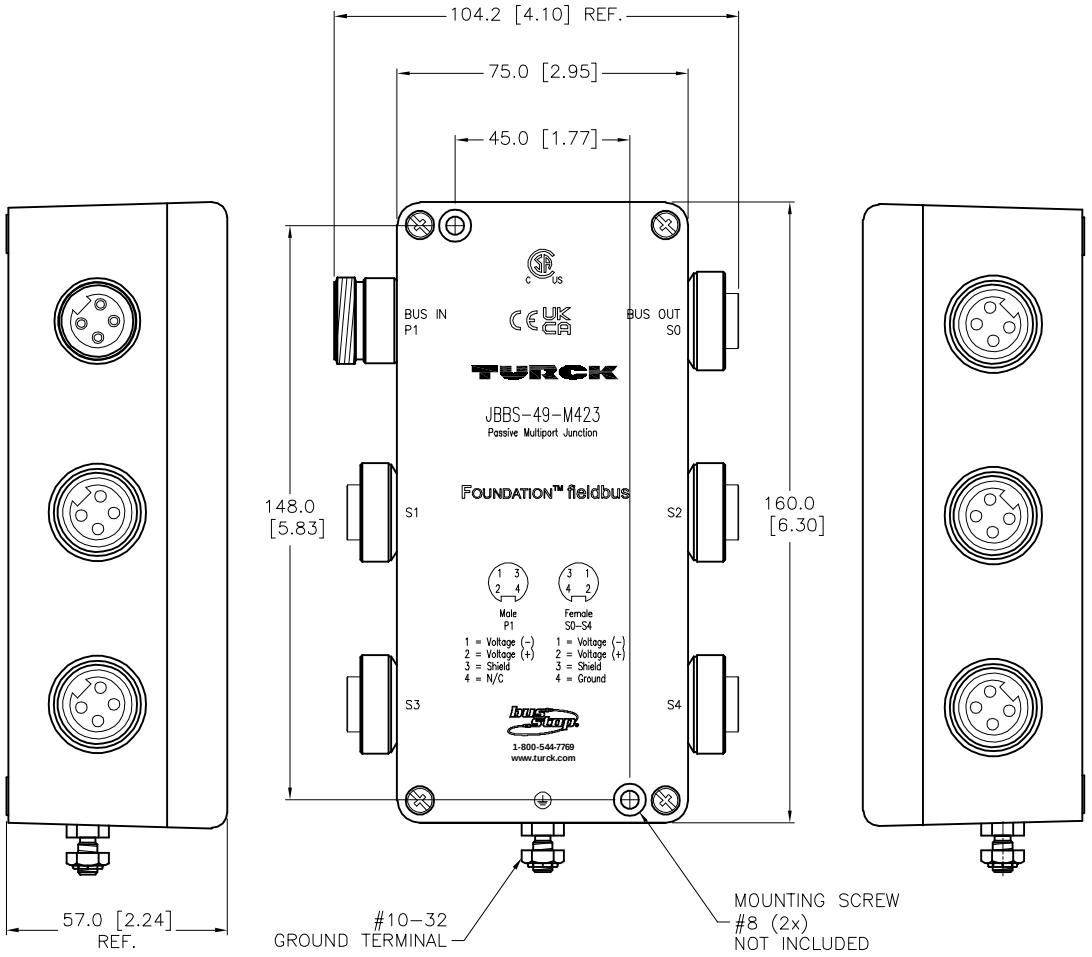

P1 CONNECTOR




1 = – VOLTAGE
2 = + VOLTAGE
3 = SHIELD
4 = N/C

mini fast.

FOUNDATION™ fieldbus

S0–S4 CONNECTORS




1 = – VOLTAGE
2 = + VOLTAGE
3 = SHIELD
4 = GROUND

mini fast.

FOUNDATION™ fieldbus

WIRING DIAGRAM

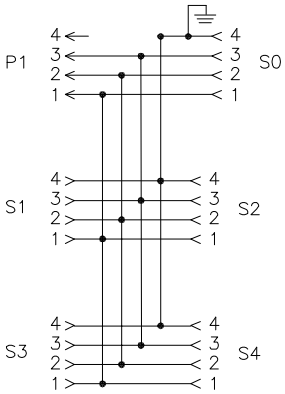

SOURCE DRAWING - FOR REFERENCE ONLY

J	UPDATE MOUNTING HOLE CALLOUT	RDS	09/22/22	500000006884
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS
1. 9-RDV-099
2.
3.
4.

3RD ANGLE PROJECTION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

MATERIAL

FINISH

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DRFT IK | DATE 7/31/98

APVD GC | SCALE 1=2.0

UNIT OF MEASUREMENT
MILLIMETER [INCH]
DO NOT SCALE THIS DRAWING

DESCRIPTION
JBBS-49-M423

IDENTIFICATION NO. U0210-30 | REV J

FILE: U0210-30 | SHEET 1 OF 1

Approved 09/23/2022, work order #258263 by M.V.