



P1 CONNECTOR	S0–S4 CONNECTORS
 1 = – VOLTAGE 2 = + VOLTAGE 3 = SHIELD 4 = N/C	 1 = – VOLTAGE 2 = + VOLTAGE 3 = SHIELD 4 = GROUND
mini fast® FOUNDATION™ fieldbus	mini fast® FOUNDATION™ fieldbus

SPECIFICATIONS	
HOUSING MATERIAL	DIE–CAST ALUMINUM ALLOY
HOUSING FINISH/COLOR	POWDER COAT/BLACK
RECEPTACLE HOUSING MAT'L/FINISH	STAINLESS STEEL/PASSIVATED
CONTACT CARRIERS/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	9–32 VDC
SHORT CIRCUIT PROTECTION	0.55 VDC @ 55mA, 0.20 VDC @ 20mA
CURRENT CONSUMPTION	5.0 mA
OPEN CIRCUIT VOLTAGE	33 VDC
PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	–40°C to +70°C (–40°F to +158°F)

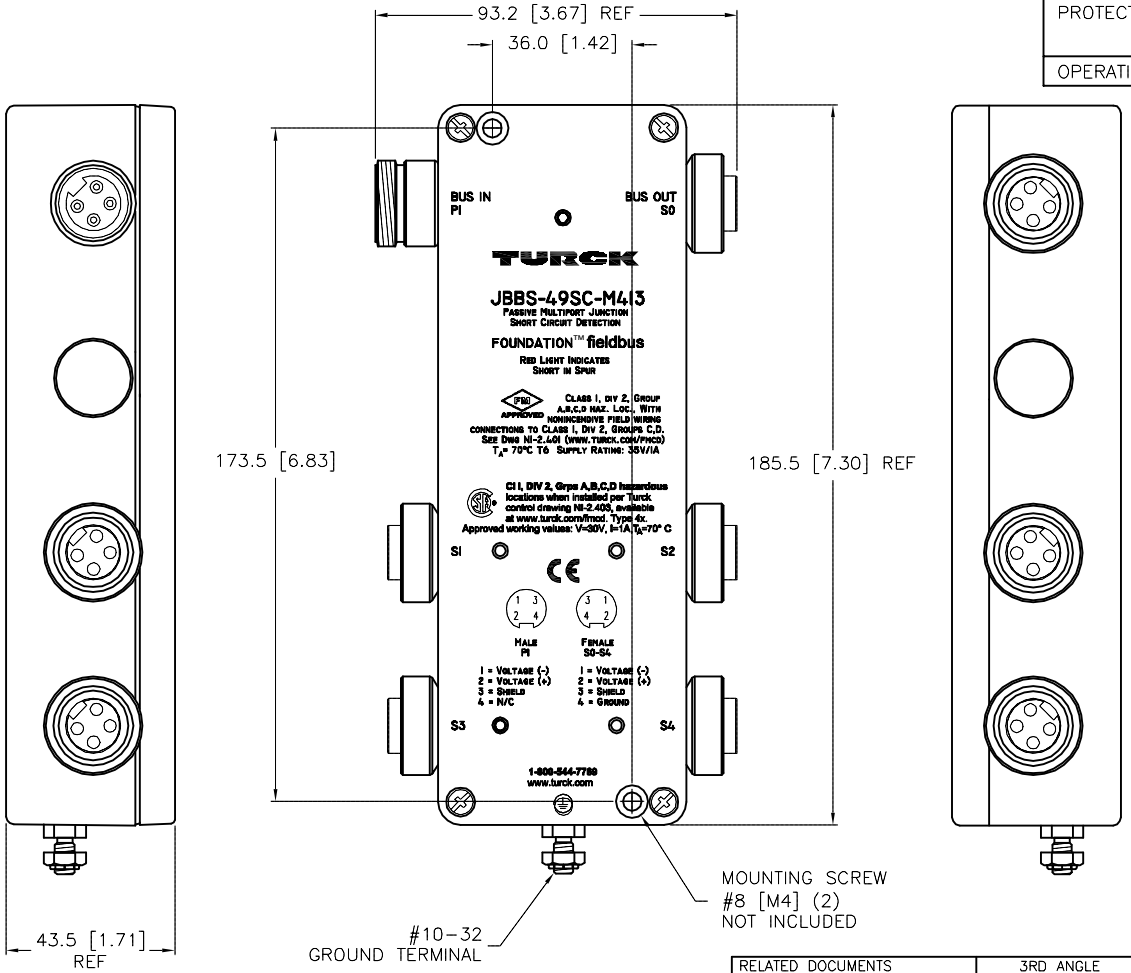

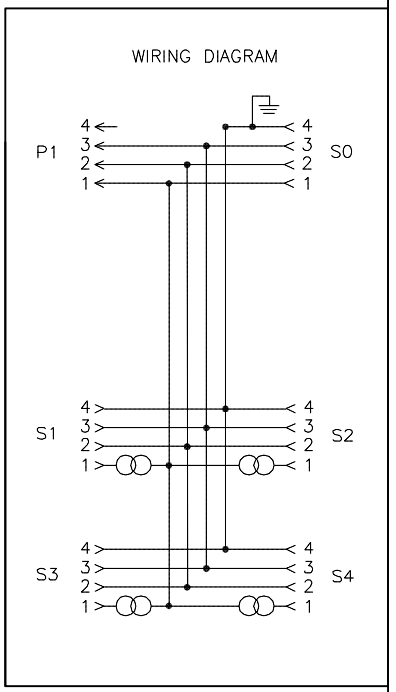

SOURCE DRAWING – FOR REFERENCE ONLY

THREADED CAPS INCLUDED



RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK INC High Technology Sensors and Automation Controls	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1–800–544–7769 (763) 553–7300 (763) 553–0708 fax turck.com
1. 2. 3. 4.				
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DRFT DF / DATE 02/04/02 APVD DF / SCALE 1=2.0 UNIT OF MEASUREMENT **MILLIMETER [INCH]** DO NOT SCALE THIS DRAWING	DESCRIPTION JBBS–49SC–M413	
FINISH			IDENTIFICATION NO. U8607	REV L
			FILE: U8607	SHEET 1 OF 1

REV	DESCRIPTION	BY	DATE	ECO NO.
L	DRAWING PROCESSED AS PART OF ECO 38770	KMY	05/07/12	38770