

SPECIFICATIONS	
HOUSING MATERIAL	FIBERGLASS
HOUSING FINISH/COLOR	POWDER COAT/BLACK
RECEPTACLE HOUSING MAT'L/FINISH	STAINLESS STEEL/PASSIVATED
CONTACT CARRIERS/COLOR	TPU/BLACK
CONTACTS MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	9–32 VDC
SHORT CIRCUIT PROTECTION	0.55 VDC @ 55mA, 0.20 VDC @ 20mA
OPEN CIRCUIT VOLTAGE	33 VDC
CURRENT CONSUMPTION	5mA
PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	–40°C to +70°C (–40°F to +158°F)

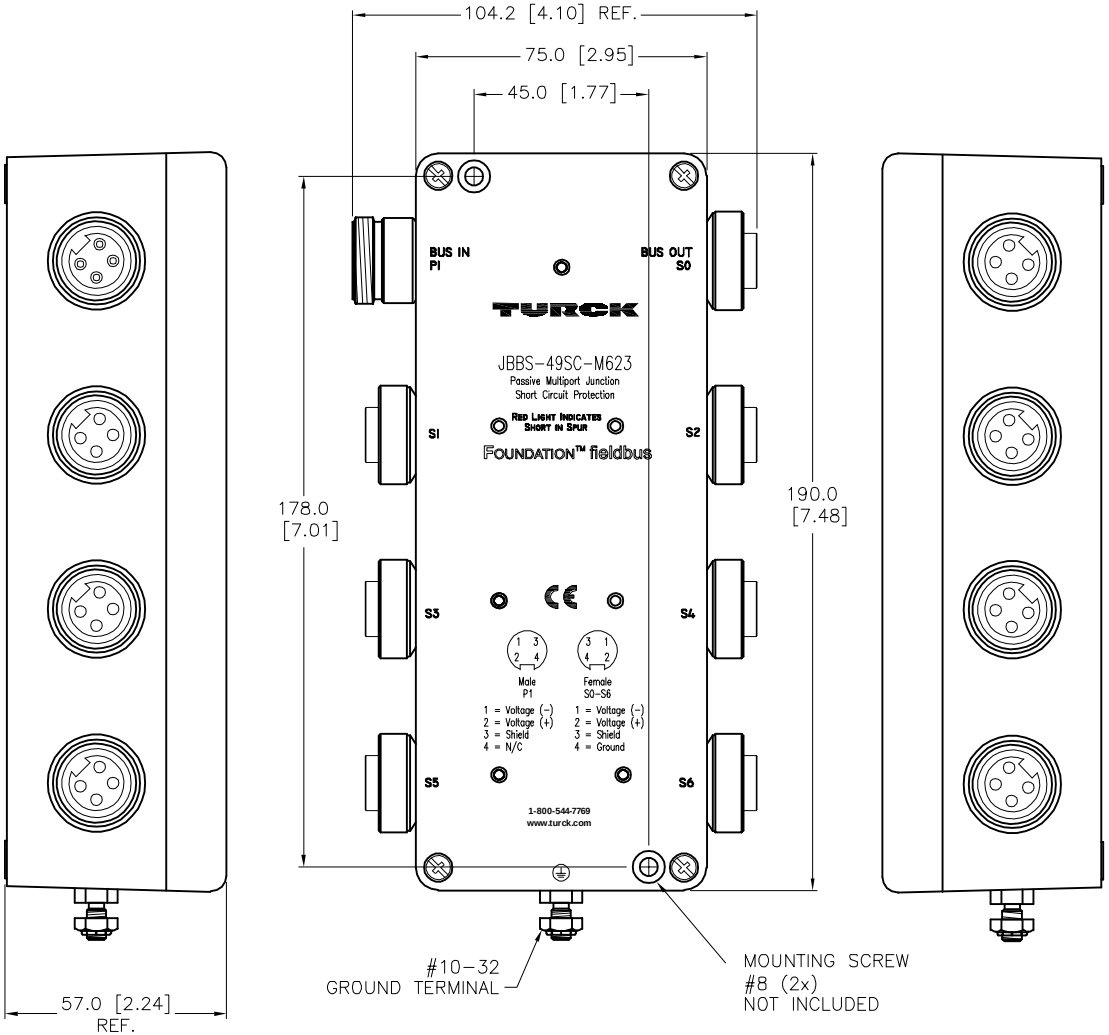


P1 CONNECTOR



1 = – VOLTAGE
2 = + VOLTAGE
3 = SHIELD
4 = N/C

minifast. FOUNDATION™ fieldbus

S0–S6 CONNECTORS





1 = – VOLTAGE
2 = + VOLTAGE
3 = SHIELD
4 = GROUND

minifast. FOUNDATION™ fieldbus

SOURCE DRAWING – FOR REFERENCE ONLY

THREADED CAPS INCLUDED

1x  7x 

REV	DESCRIPTION	BY	DATE	ECO NO.
F	UPDATE MOUTNING SCREW CALLOUT	RDS	09/21/22	500000006864

RELATED DOCUMENTS
1.
2.
3.
4.

MATERIAL

FINISH

3RD ANGLE PROJECTION

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1–800–544–7769
(763) 553–7300
(763) 553–0708 fax
www.turck.us

DRFT RDS | DATE 07/14/08
APVD | SCALE 1=2.0

UNIT OF MEASUREMENT
MILLIMETER [INCH]
DO NOT SCALE THIS DRAWING

DESCRIPTION: JBBS–49SC–M623
IDENTIFICATION NO.: U3–10791
REV: F
FILE: U3–10791
SHEET 1 OF 1

Approved 09/27/2022, work order #258210 by G.L.