



P1 CONNECTOR	S0–S6 CONNECTORS
 1 = – VOLTAGE 2 = + VOLTAGE 3 = SHIELD 4 = N/C	 1 = – VOLTAGE 2 = + VOLTAGE 3 = SHIELD 4 = GROUND
mini fast. FOUNDATION™ fieldbus	mini fast. FOUNDATION™ fieldbus


SPECIFICATIONS	
HOUSING MATERIAL/FINISH	STAINLESS STEEL/ELECTRO–POLISHED
RECEPTACLE HOUSING MAT'L/FINISH	STAINLESS STEEL/PASSIVATED
CONTACT CARRIERS/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	9–32 VDC
SHORT CIRCUIT PROTECTION	0.55 VDC @ 55mA, 0.20 VDC @ 20mA
CURRENT CONSUMPTION	5.0 mA
OPEN CIRCUIT VOLTAGE	33 VDC
PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	–40°C to +70°C (–40°F to +158°F)

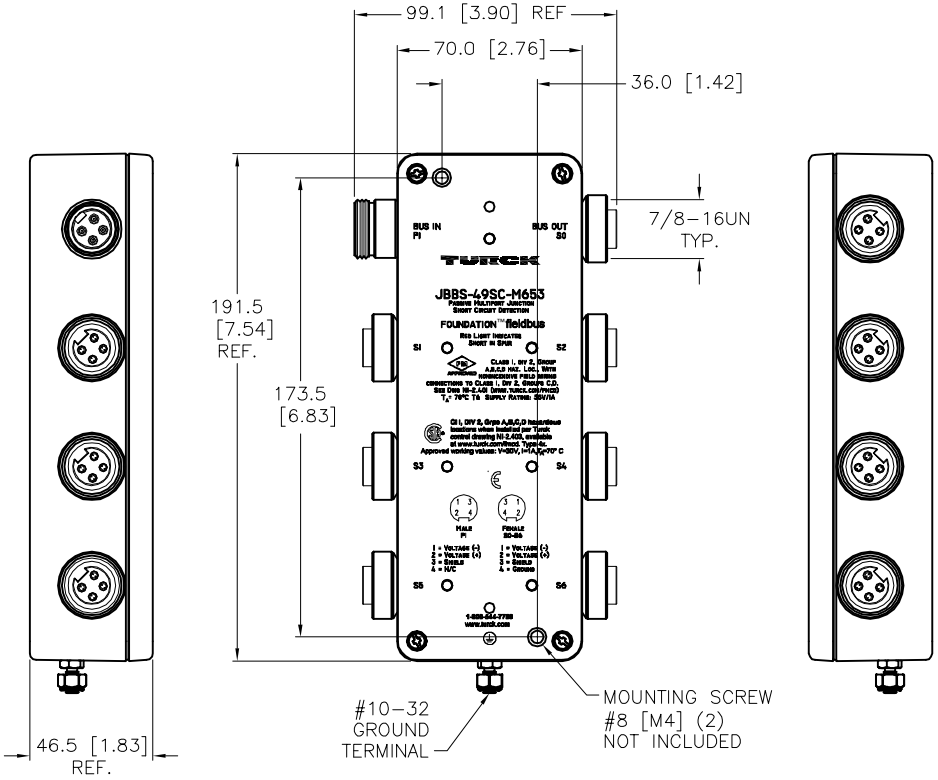

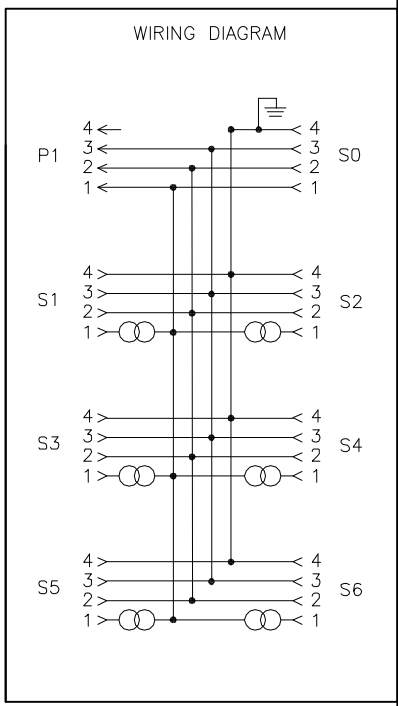

SOURCE DRAWING – FOR REFERENCE ONLY

THREADED CAPS INCLUDED



REV	DESCRIPTION	BY	DATE	ECO NO.
C	UPDATE COVER PER ECO	TR	07/30/26	500000012869

RELATED DOCUMENTS
1.
2.
3.
4.

3RD ANGLE PROJECTION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1–800–544–7769
(763) 553–7300
(763) 553–0708 fax
www.turck.us

MATERIAL

FINISH

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DRFT *CK | DATE 06/16/10
APVD | SCALE 1=3.0

UNIT OF MEASUREMENT
MILLIMETER [INCH]
DO NOT SCALE THIS DRAWING

DESCRIPTION
JBBS–49SC–M653

IDENTIFICATION NO.
U3–10870

REV
C

FILE: U3–10870

SHEET 1 OF 1