
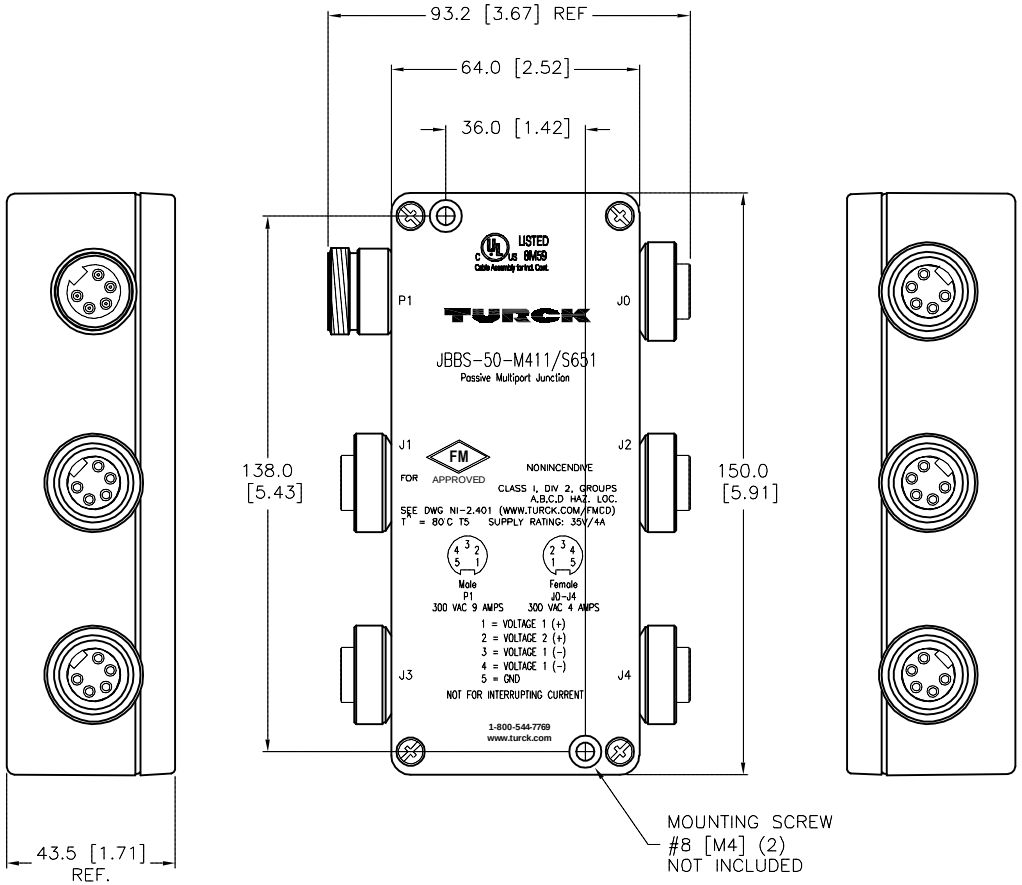


SPECIFICATIONS


HOUSING MATERIAL	DIE-CAST ALUMINUM ALLOY
HOUSING FINISH/COLOR	POWDER COAT/BLACK
RECEPTACLE HOUSING MAT'L/PLATING	BRASS/NICKEL
CONTACT CARRIERS MATERIAL	TPU
CONTACTS MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	300 V
OPERATING CURRENT	9.0 A PER CONDUCTOR
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to +70°C (-40°F to +158°F)

P1 CONNECTOR




1 = VOLTAGE 1 (+)
2 = VOLTAGE 2 (+)
3 = VOLTAGE 1 (-)
4 = VOLTAGE 1 (-)
5 = GND

J0-J4 CONNECTORS



1 = VOLTAGE 1 (+)
2 = VOLTAGE 2 (+)
3 = VOLTAGE 1 (-)
4 = VOLTAGE 1 (-)
5 = GND

WIRING DIAGRAM



SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "/S651" DESIGNATES PARALLEL WIRING.

REV	DESCRIPTION	BY	DATE	ECO NO.
A	DRAWING RELEASE	NF	08/14/18	

RELATED DOCUMENTS
1.
2.
3.
4.

3RD ANGLE PROJECTION

MATERIAL

FINISH

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT NF | DATE 08/14/18
APVD M.F. | SCALE 1=2.0

UNIT OF MEASUREMENT
MILLIMETER [INCH]
DO NOT SCALE THIS DRAWING

TURCK
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

DESCRIPTION: JBBS-50-M411/S651
IDENTIFICATION NO.: U2-32709
REV: A
FILE: U2-32709
SHEET 1 OF 1