
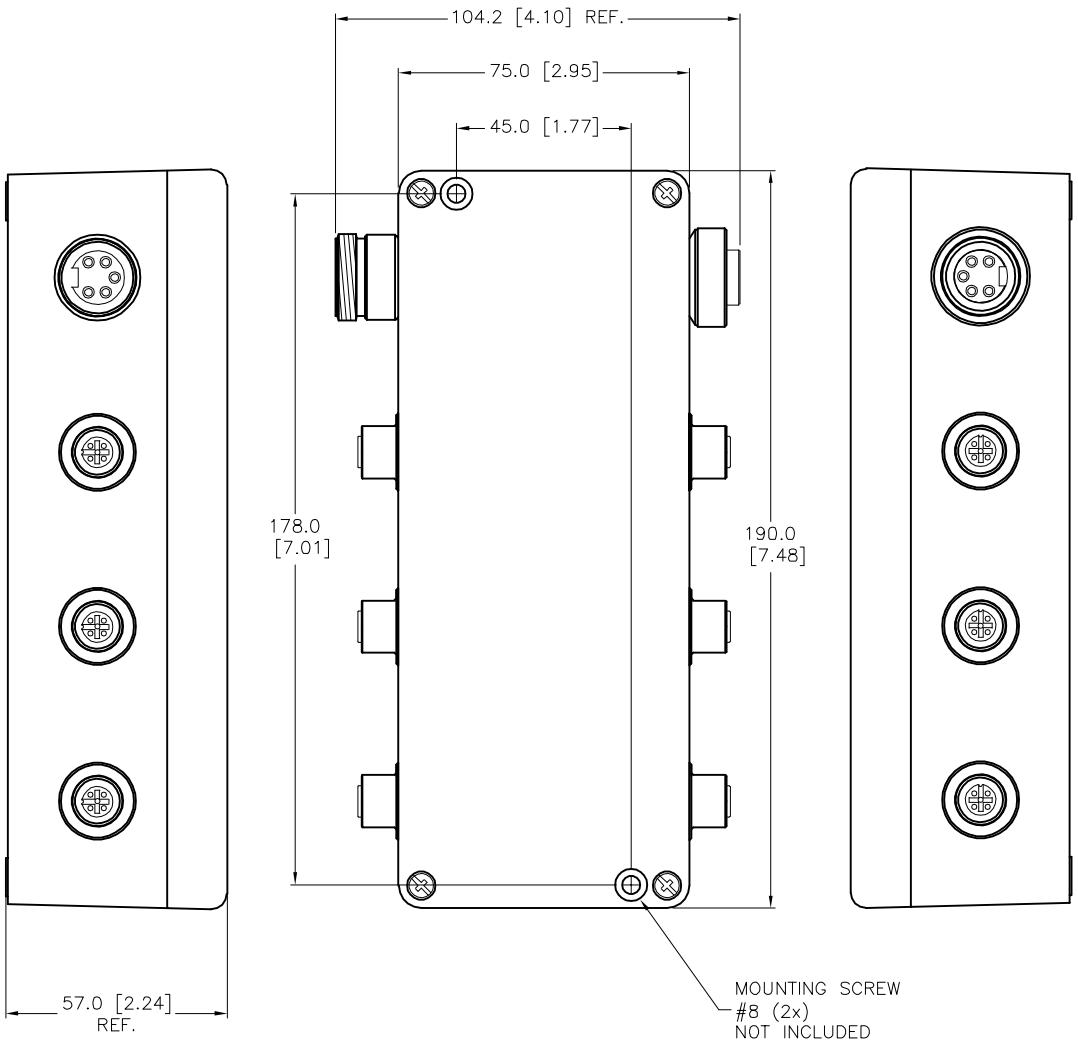


SPECIFICATIONS	
HOUSING MATERIAL	FIBERGLASS
HOUSING FINISH/COLOR	BLACK
RECEPTACLE HOUSING MAT'L/PLATING	BRASS/NICKEL
CONTACT CARRIERS	TPU
CONTACT MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	300 V
OPERATING CURRENT	4.0 A PER CONDUCTOR
PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	–40°C to +80°C (–40°F to +176°F)


P1 CONNECTOR



1 = SHIELD
2 = + VOLTAGE
3 = – VOLTAGE
4 = CAN_H
5 = CAN_L

mini fast. DeviceNet™


J0 CONNECTOR



1 = SHIELD
2 = + VOLTAGE
3 = – VOLTAGE
4 = CAN_H
5 = CAN_L

mini fast. DeviceNet™


J1–J6 CONNECTORS



1 = SHIELD
2 = + VOLTAGE
3 = – VOLTAGE
4 = CAN_H
5 = CAN_L

euro fast. DeviceNet™

WIRING DIAGRAM

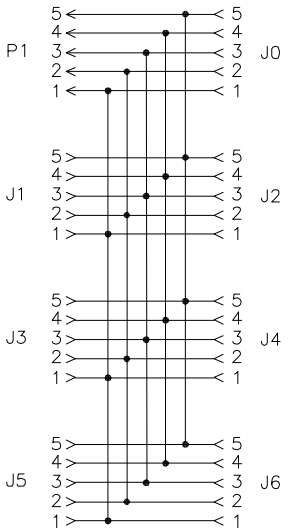

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "/CS11978" DESIGNATES NO CLICHE REQUIRED.

REV	DESCRIPTION	BY	DATE	ECO NO.
D	UPDATE MOUNTING HOLE CALLOUT	RDS	09/21/22	500000006865

RELATED DOCUMENTS
1.
2.
3.
4.

MATERIAL

FINISH

3RD ANGLE PROJECTION

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

DRFT RDS | DATE 06/06/08
APVD | SCALE 1=2.0

UNIT OF MEASUREMENT
MILLIMETER [INCH]
DO NOT SCALE THIS DRAWING

DESCRIPTION
JBBS-57-E621/CS11978

IDENTIFICATION NO. U2-13871 | REV D

FILE: U2-13871 | SHEET 1 OF 1