
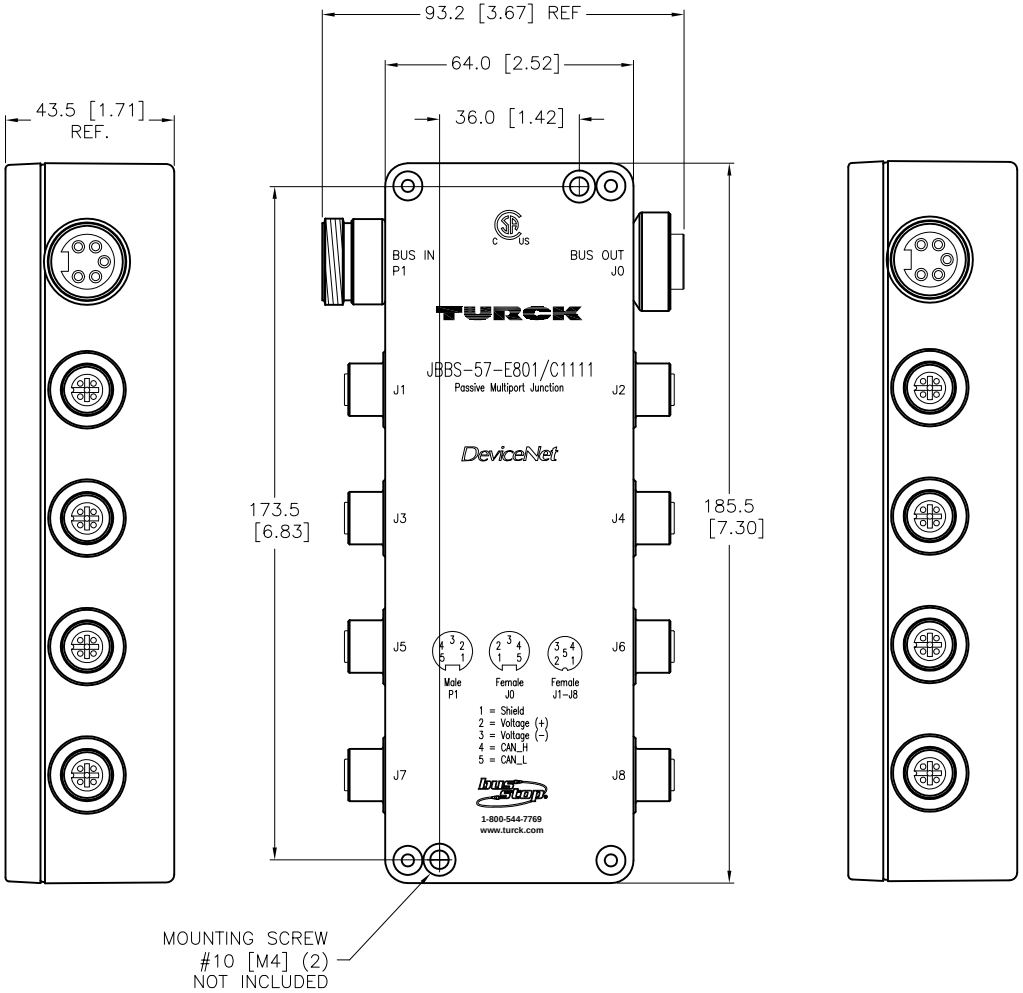


SPECIFICATIONS	
HOUSING MATERIAL	DIE-CAST ALUMINUM ALLOY
HOUSING FINISH/COLOR	POWDER COAT/BLACK
RECEPTACLE HOUSING MAT'L/PLATING	BRASS/NICKEL
CONTACT CARRIERS MATERIAL	TPU
CONTACTS MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	300 V
OPERATING CURRENT	4.0 A PER CONDUCTOR
PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-30°C to 80°C (-22°F to 176°C)


P1 CONNECTOR



1 = SHIELD
2 = + VOLTAGE
3 = – VOLTAGE
4 = CAN_H
5 = CAN_L

mini fast. DeviceNet™


J0 CONNECTOR



1 = SHIELD
2 = + VOLTAGE
3 = – VOLTAGE
4 = CAN_H
5 = CAN_L

mini fast. DeviceNet™


J1–J8 CONNECTORS



1 = SHIELD
2 = + VOLTAGE
3 = – VOLTAGE
4 = CAN_H
5 = CAN_L

euro fast. DeviceNet™

WIRING DIAGRAM

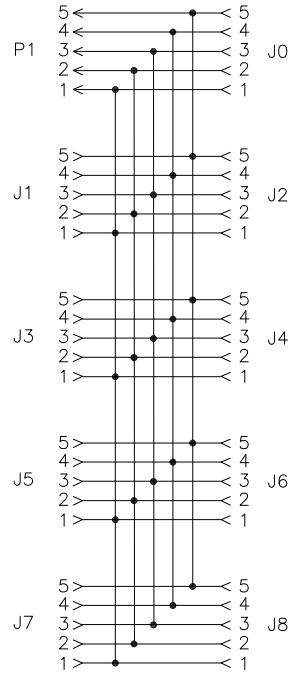

NOTES:

1. /C1111 INDICATES REVERSE MOUNTING HOLE PATTERN.

REV	DESCRIPTION	BY	DATE	ECO NO.
E	DRAWING PROCESSED AS PART OF ECO 38770	KMY	05/01/12	38770

RELATED DOCUMENTS
1. U0214
2.
3.
4.

3RD ANGLE PROJECTION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK INC
High Technology Sensors and Automation Controls
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
turck.com

MATERIAL

FINISH

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DRFT	GC	DATE	11/15/00
APVD	GC	SCALE	1=2.0

UNIT OF MEASUREMENT
MILLIMETER [INCH]
DO NOT SCALE THIS DRAWING

DESCRIPTION
JBBS-57-E801/C1111

IDENTIFICATION NO.
U0214-111

REV
E

FILE: U0214-111

SHEET 1 OF 1

Approved 05/14/2012, work order #28291 by D.E.