
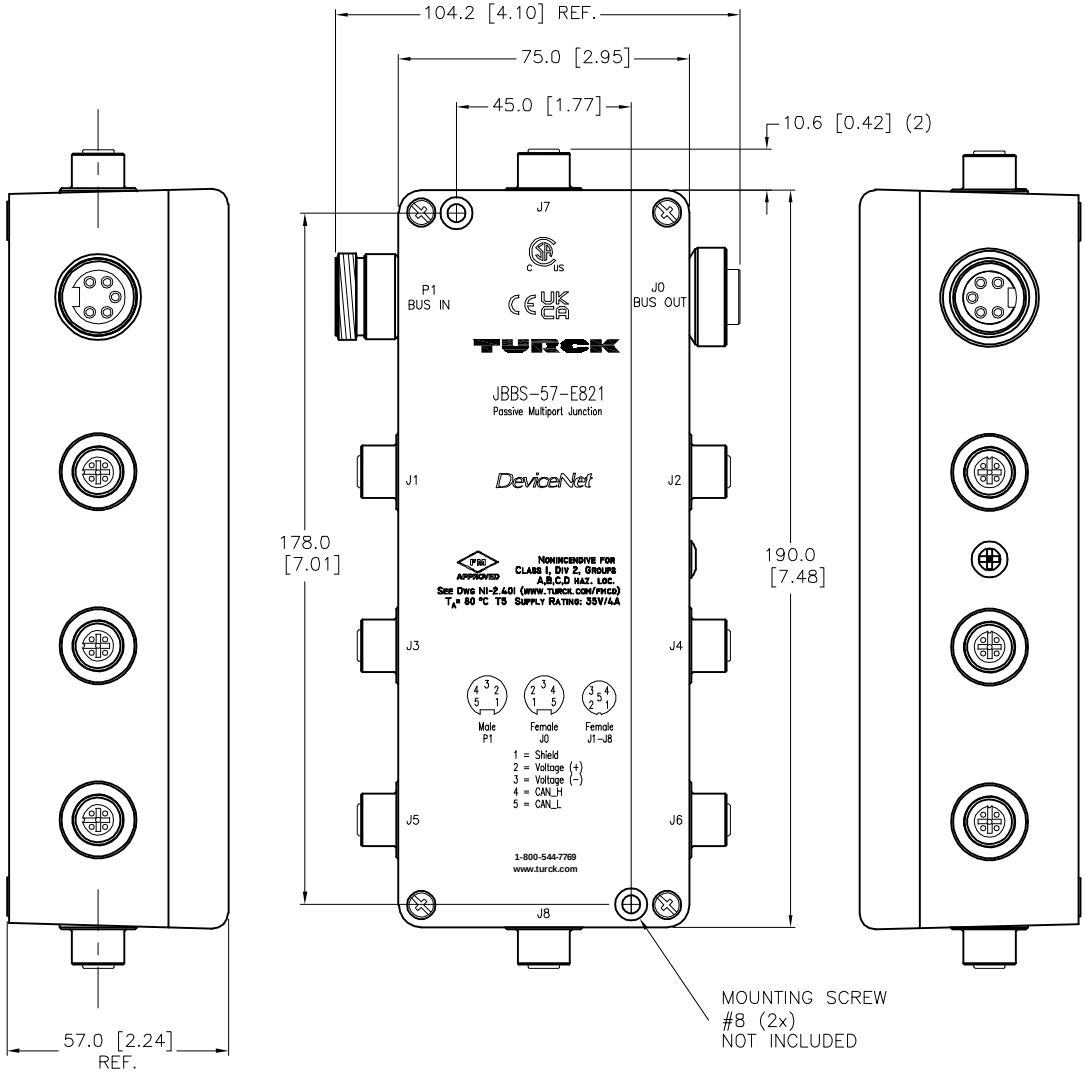


SPECIFICATIONS	
HOUSING MATERIAL	FIBERGLASS
HOUSING FINISH/COLOR	BLACK
RECEPTACLE HOUSING MAT'L/PLATING	BRASS/NICKEL
CONTACT CARRIERS	TPU
CONTACT MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	300 V
OPERATING CURRENT	4.0 A PER CONDUCTOR
PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	–40°C to +70°C (–40°F to +158°F)


P1 CONNECTOR



1 = SHIELD
2 = + VOLTAGE
3 = – VOLTAGE
4 = CAN_H
5 = CAN_L

mini fast. DeviceNet™


J0 CONNECTOR



1 = SHIELD
2 = + VOLTAGE
3 = – VOLTAGE
4 = CAN_H
5 = CAN_L

mini fast. DeviceNet™


J1–J8 CONNECTORS



1 = SHIELD
2 = + VOLTAGE
3 = – VOLTAGE
4 = CAN_H
5 = CAN_L

euro fast. DeviceNet™

WIRING DIAGRAM

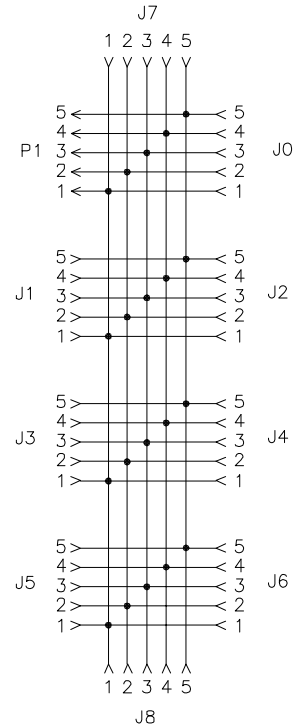

K	UPDATE MOUNTING HOLE CALLOUT	RDS	09/21/22	500000006862
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS
1.
2.
3.
4.

3RD ANGLE PROJECTION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

MATERIAL

FINISH

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DRFT	GC	DATE	3/28/98
APVD	GC	SCALE	1=2.0

UNIT OF MEASUREMENT
MILLIMETER [INCH]
DO NOT SCALE THIS DRAWING

DESCRIPTION
JBBS-57-E821

IDENTIFICATION NO.
U0212-2

REV
K

FILE: U0212-2

SHEET 1 OF 1

Approved 09/27/2022, work order #258221 by G.L.