

MALE END VIEW (P1)



1 = (SHIELD)
2 = (+ VOLTAGE)
3 = (– VOLTAGE)
4 = (CAN_H)
5 = (CAN_L)

euro fast. DeviceNet™


FEMALE END VIEW (J1–J4)



1 = (SHIELD)
2 = (+ VOLTAGE)
3 = (– VOLTAGE)
4 = (CAN_H)
5 = (CAN_L)


euro fast. DeviceNet™

WIRING DIAGRAM

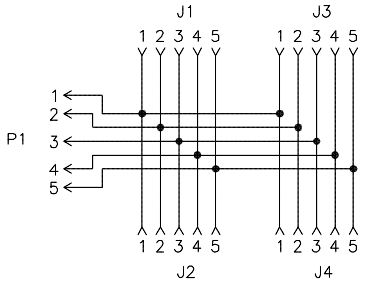

SPECIFICATIONS

MATING CORDSET	5–PIN FEMALE EURO
HOUSING MATERIAL/COLOR	NYLON/BLUE–GREY
RECEPTACLE MATERIAL/FINISH	BRASS/NICKEL (P1), (J1–J4)
CONTACT CARRIER MATERIAL/COLOR	NYLON/BLACK (P1), (J1–J4)
CONTACT MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	30 V
OPERATING CURRENT	4.0 A TOTAL
PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	–30°C to 80°C (–22°F to 176°F)

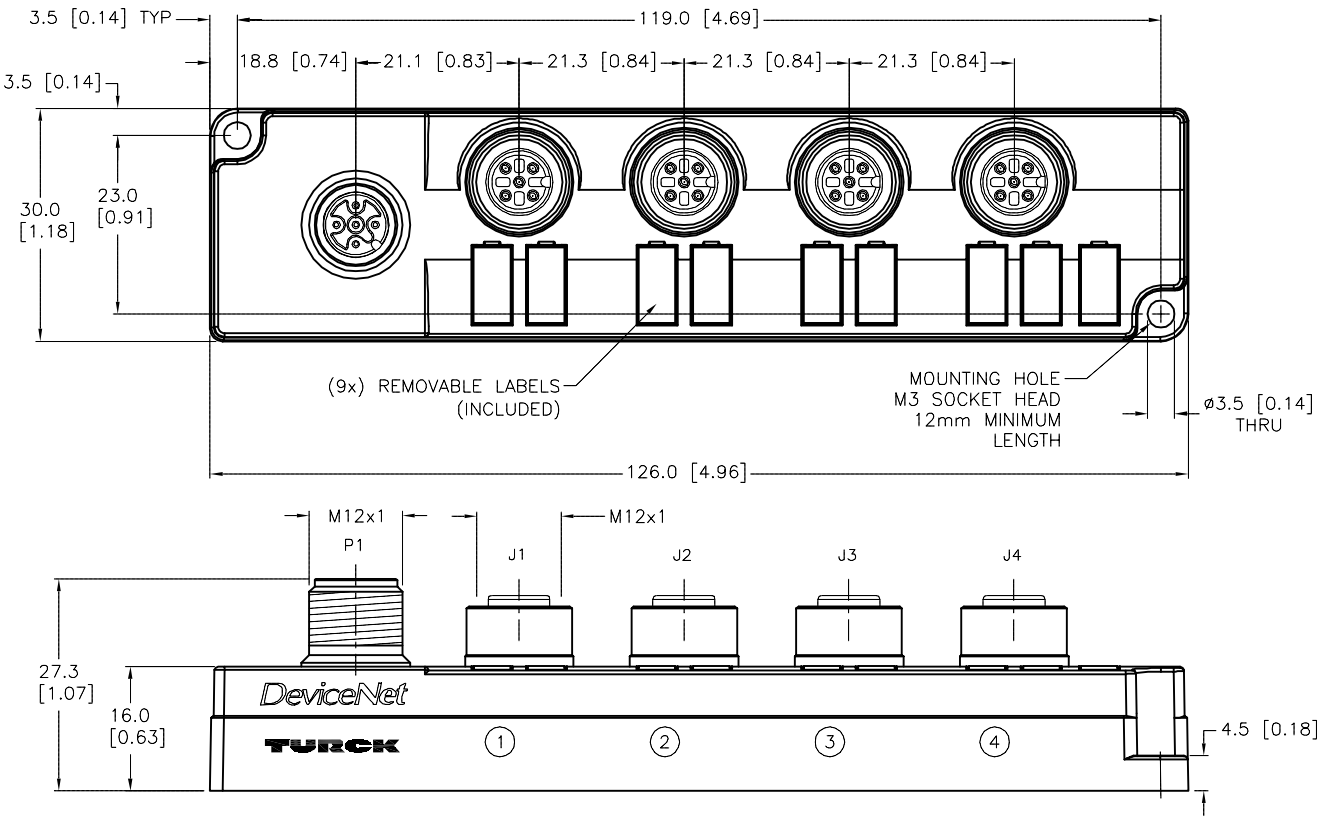

SOURCE DRAWING - FOR REFERENCE ONLY

REV	DESCRIPTION	BY	DATE	ECO NO.
C	UPDATE HOUSING BOX TO NEW VERSION	RDS	01/28/19	67823

RELATED DOCUMENTS
1.
2.
3.
4.

3RD ANGLE PROJECTION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1–800–544–7769
(763) 553–7300
(763) 553–0708 fax
www.turck.us

MATERIAL: SEE SPECIFICATIONS

FINISH: SEE SPECIFICATIONS

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DRFT: MDS | DATE: 07/08/04
APVD: GC | SCALE: 1=1.0

UNIT OF MEASUREMENT
MILLIMETER [INCH]
DO NOT SCALE THIS DRAWING

DESCRIPTION: JBBS–57–FS–E424

IDENTIFICATION NO.: U9657 | REV: C

FILE: U9657 | SHEET 1 OF 1