




RSM 57–TR2/VM
(INCLUDED IN PACKAGE)

SPECIFICATIONS	
HOUSING MATERIAL	DIE–CAST ALUMINUM ALLOY
HOUSING FINISH/COLOR	POWDER COAT/BLACK
RECEPTACLE HOUSING MAT'L/PLATING	BRASS/NICKEL
CONTACT CARRIERS/COLOR	NYLON OR TPU/BLK (P0–P3), BLUE–GRAY (J0–J4)
CONTACT MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	300 V
OPERATING CURRENT	4.0 A PER CONDUCTOR
PROTECTION CLASS to DIN 40050	IP 67
OPERATING TEMPERATURE	–40°C to +70°C (–40°F to +158°F)

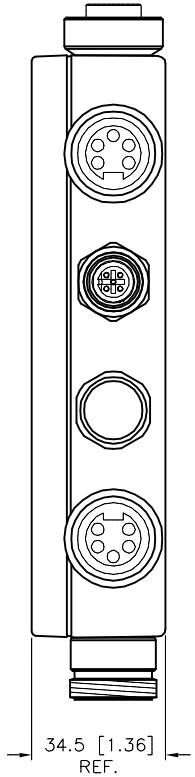


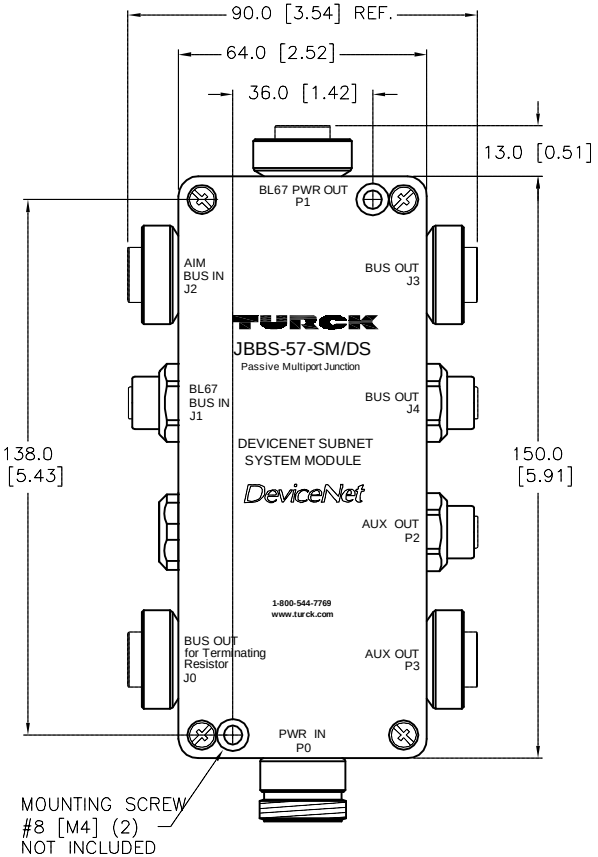



MALE END VIEW

POWER IN (P0)




1 = GND
2 = GND
3 = SHIELD
4 = V_I+
5 = V_O+

BLACK CTH

mini fast.

FEMALE END VIEW

BL67 POWER OUT (P1)




1 = GND
2 = GND
3 = SHIELD
4 = V_I+
5 = V_O+

BLACK CTH

mini fast.

FEMALE END VIEW

BUS IN/OUT (J0,J2,J3)




1 = SHIELD
2 = V+
3 = V–
4 = CAN_H
5 = CAN_L

BU/GY CTH

mini fast. DeviceNet™

FEMALE END VIEW

BUS IN/OUT (J1,J4)




1 = SHIELD
2 = V+
3 = V–
4 = CAN_H
5 = CAN_L

BU/GY CTH

euro fast. DeviceNet™

FEMALE END VIEW

AUX OUT (P2)




1 = V_I+
2 = V_O+
3 = GND
4 = GND

BLACK CTH

euro fast.

FEMALE END VIEW

AUX OUT (P3)



1 = V_{aux}+
2 = N/C
3 = N/C
4 = V_{aux}–


BLACK CTH

mini fast.

SOURCE DRAWING – FOR REFERENCE ONLY



CLOSURE CAPS
(3 INCLUDED)

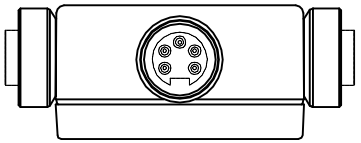

NOTE: "P" REPRESENTS POWER PORT. "J" REPRESENTS NETWORK JUNCTION PORT.

REV	DESCRIPTION	BY	DATE	ECO NO.
D	UPDATED CLOSURE CAPS	TV	09/15/15	48811

RELATED DOCUMENTS
1.
2.
3.
4.

3RD ANGLE PROJECTION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK INC
High Technology Sensors and Automation Controls
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1–800–544–7769
(763) 553–7300
(763) 553–0708 fax
turck.com

MATERIAL

FINISH

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DRFT RDS | DATE 11/09/09
APVD | SCALE 1=2.0

UNIT OF MEASUREMENT
MILLIMETER [INCH]
DO NOT SCALE THIS DRAWING

DESCRIPTION
JBBS–57–SM/DS

IDENTIFICATION NO.
U3–10863

REV
D

FILE: U3–10863

SHEET 1 OF 1