TERMINAL BLOCK PLUGS





1 = VOLTAGE (–)
2 = CAN_L
3 = SHIELD
4 = CAN_H
5 = VOLTAGE (+)

DeviceNet™


SPECIFICATIONS

HOUSING MATERIAL	DIE–CAST ALUMINUM ALLOY
HOUSING FINISH/COLOR	POWDER COAT/BLACK
CABLE GLAND MATERIAL/COLOR	POLYAMIDE/BLACK
OPERATING VOLTAGE	300 V
OPERATING CURRENT	8.0 A PER TERMINAL
CABLE GLAND RANGE	7–13 mm
OPERATING TEMPERATURE	–40°C to +70°C (–40°F to +158°F)

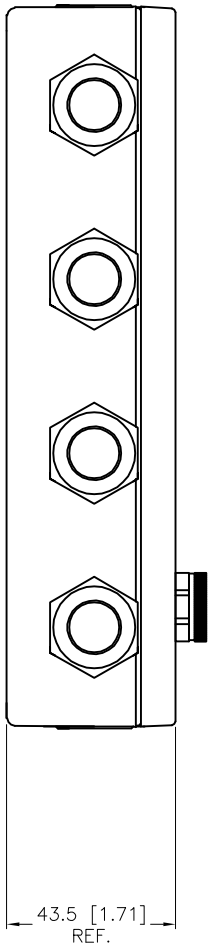

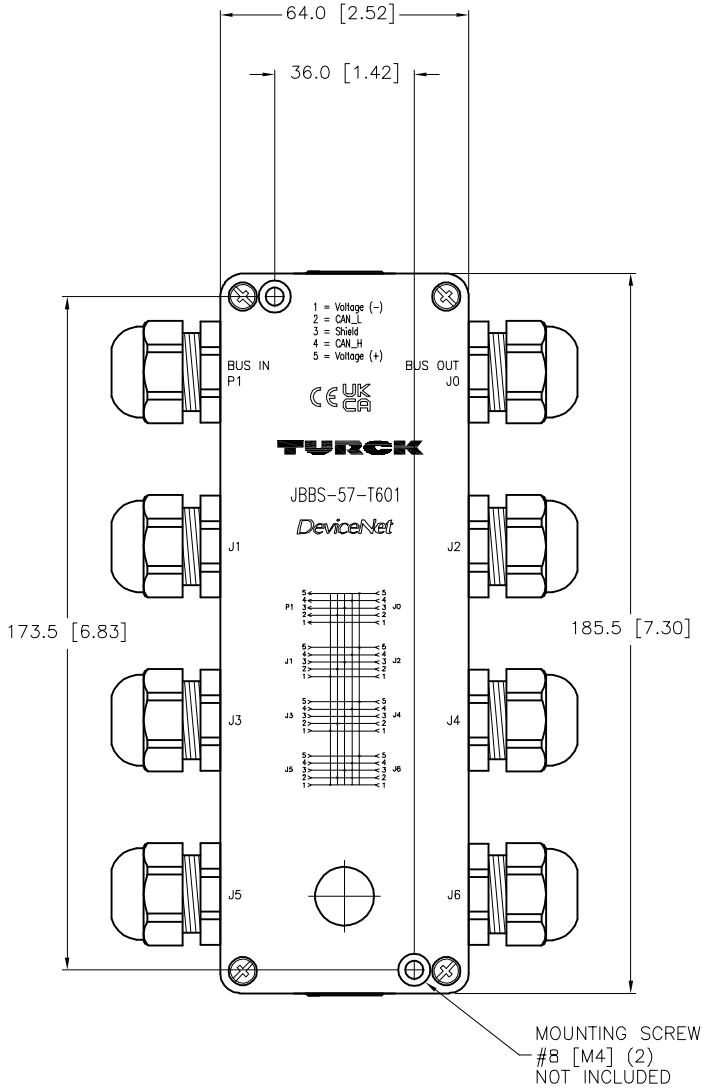

WIRING DIAGRAM

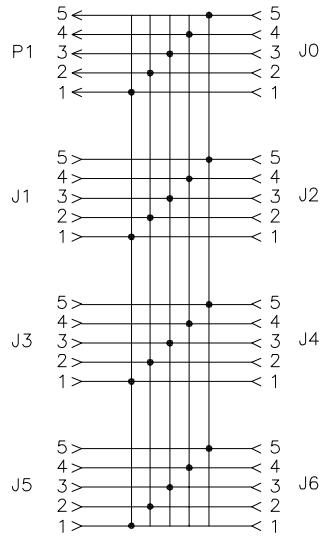

SOURCE DRAWING – FOR REFERENCE ONLY

REV	DESCRIPTION	BY	DATE	ECO NO.
C	ADD CE–UKCA MARK TO CLICHE	RDS	08/18/22	500000006082

RELATED DOCUMENTS
1.
2.
3.
4.

3RD ANGLE PROJECTION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1–800–544–7769
(763) 553–7300
(763) 553–0708 fax
www.turck.us

MATERIAL

FINISH

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DRFT GAR | DATE 07/17/07

APVD | SCALE 1=2.0

UNIT OF MEASUREMENT
MILLIMETER [INCH]
DO NOT SCALE THIS DRAWING

DESCRIPTION
JBBS–57–T601

IDENTIFICATION NO.
U3–00886

REV
C

FILE: U3–00886

SHEET 1 OF 1