

SPECIFICATIONS	
HOUSING MATERIAL/COLOR	NYLON/BLACK
RECEPTACLE HOUSING MAT'L/PLATING	BRASS/NICKEL
CONTACT CARRIER MATERIAL	TPU
CONTACT MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	30 V
OPERATING CURRENT	9.0 A (MINIFAST), 3.0 A (PICOFAST)
PROTECTION CLASS	NEMA 1,3,4,6P AND IP67 – ONLY WHEN ALL RECEPT. COVERED W/ PLUGS OR CONNECTED
OPERATING TEMPERATURE	–25°C to +70°C (–13°F to +158°F)
LED FUNCTION	(3x) POWER LEDs: HIGH VOLTAGE: >25.6V (AMBER) LOW VOLT.: <12.9 (AMBER) POWER: 12.9V–25.6V (GREEN)

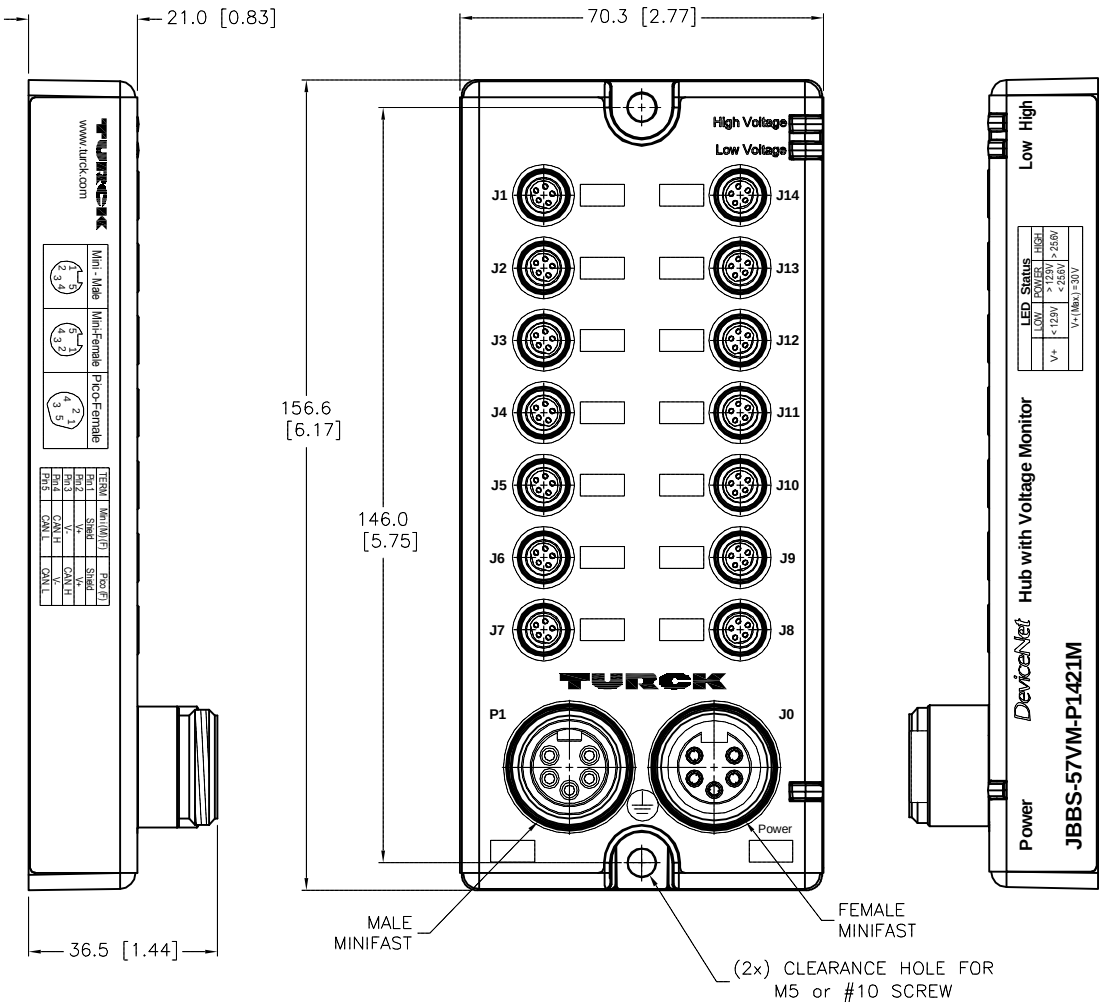


INTERNAL CIRCUITRY


WIRING DIAGRAM

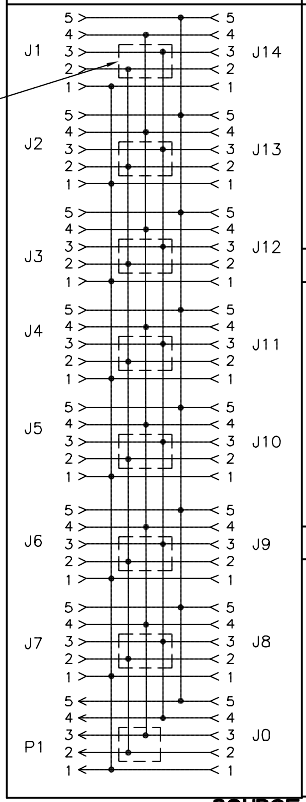


FEMALE END VIEW



MALE END VIEW



FEMALE END VIEW



SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. INTERNAL VOLTAGE MONITORING CIRCUITRY IS LOCATED BETWEEN PINS 2 AND 3.

REV	DESCRIPTION	BY	DATE	ECO NO.
B	UPDATED NOTES AND WIRING DIAGRAM PER ECO	TV	08/26/16	56165

RELATED DOCUMENTS
1.
2.
3.
4.

3RD ANGLE PROJECTION

MATERIAL

FINISH

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

DRFT RDS | DATE 10/22/12
APVD C.V. | SCALE 1=1.5

UNIT OF MEASUREMENT
MILLIMETER [INCH]
DO NOT SCALE THIS DRAWING

DESCRIPTION
JBBS-57VM-P1421M

IDENTIFICATION NO.
U3-10882

REV
B

FILE: U3-10882

SHEET 1 OF 1

Approved 09/29/2016, work order #112815 by M.F.