

TERMINAL BLOCK PLUG




1 = RED (V+)
2 = WHITE (CAN_H)
3 = BARE (SHLD)
4 = BLUE (CAN_L)
5 = BLACK (V–)

WIRING DIAGRAM

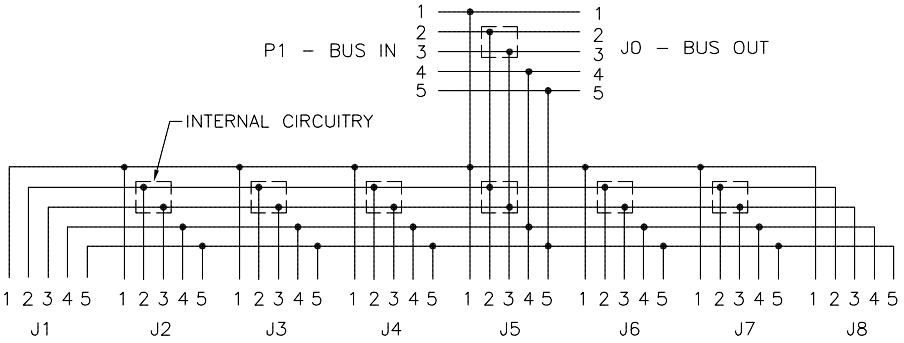


SPECIFICATIONS

HOUSING MATERIAL/COLOR	EXTRUDED ALUMINUM/BLACK
END CAPS/COLOR	NYLON/BLACK
TERMINAL BLOCK MATERIAL/COLOR	NYLON/BLACK
PROTECTION CLASS	IP 20
OPERATING TEMPERATURE	–30°C to +70°C (–22°F to +158°F)
MAXIMUM CURRENT CONSUMPTION FROM BUS	≤ 12 mA

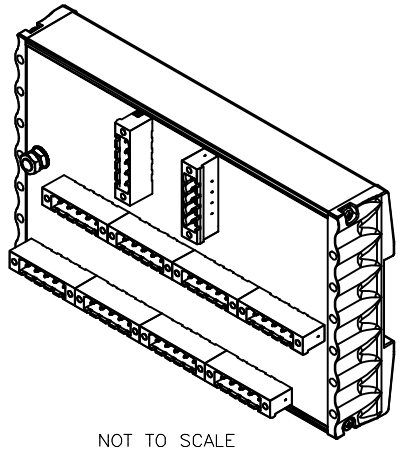

NOT TO SCALE

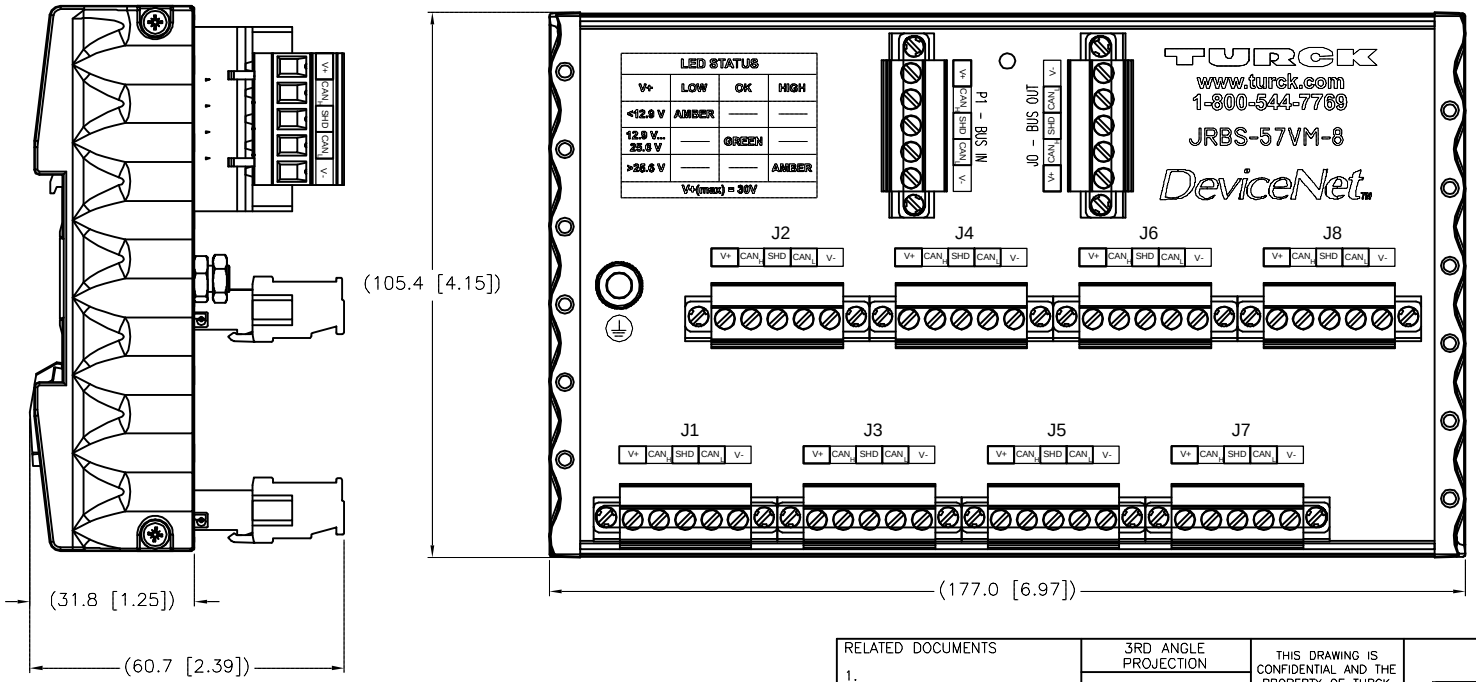

SOURCE DRAWING – FOR REFERENCE ONLY

NOTES:

1. INTERNAL VOLTAGE MONITORING CIRCUITRY IS LOCATED BETWEEN PINS 2 AND 3.

REV	DESCRIPTION	BY	DATE	ECO NO.
C	UPDATED NOTES AND WIRING DIAGRAM PER ECO	TV	08/26/16	56165

RELATED DOCUMENTS
1.
2.
3.
4.

MATERIAL

FINISH

3RD ANGLE PROJECTION

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1–800–544–7769
(763) 553–7300
(763) 553–0708 fax
www.turck.us

DRFT MS | DATE 09/11/07
APVD | SCALE 1=1.5

UNIT OF MEASUREMENT
MILLIMETER [INCH]
DO NOT SCALE THIS DRAWING

DESCRIPTION: JRBS–57VM–8
IDENTIFICATION NO.: U3–10595
REV: C
FILE: U3–10595
SHEET 1 OF 1