


# PS310-0V-01-LI2UPN8-H1141

## Pressure Sensor – Relative Pressure: -1...0 Bar

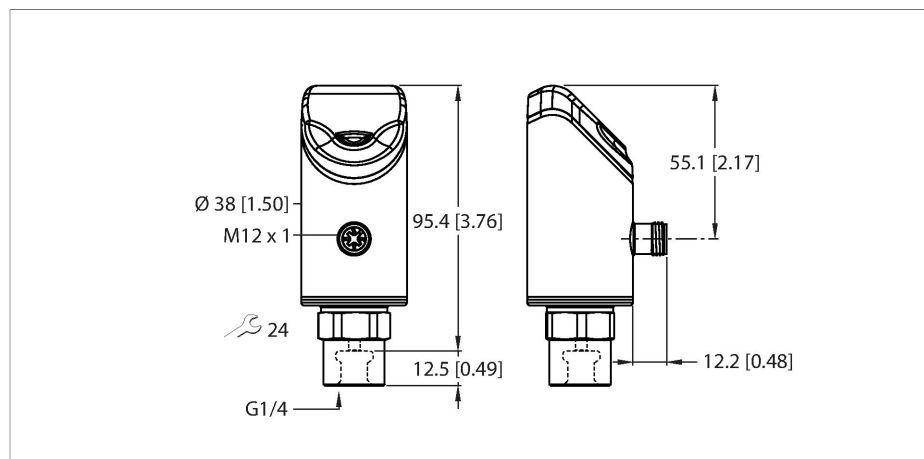


### Technical data

|                                           |                                    |
|-------------------------------------------|------------------------------------|
| Type                                      | PS310-0V-01-LI2UPN8-H1141          |
| ID                                        | 100001491                          |
| Medium temperature                        | -30...+80 °C                       |
| Application area                          | Liquids and gases                  |
| <b>Pressure range</b>                     |                                    |
| Pressure type                             | Relative pressure                  |
| Pressure range                            | -1...0 bar                         |
|                                           | -14.5...0 psi                      |
|                                           | -0.1...0 MPa                       |
| Admissible overpressure                   | ≤ 5.5 bar                          |
| Burst pressure                            | ≥ 5.5 bar                          |
| Response time                             | ≤ 3 ms                             |
| <b>Electrical data</b>                    |                                    |
| Operating voltage $U_b$                   | 18...33 VDC                        |
| Short-circuit/reverse polarity protection | yes, cyclic / yes (voltage supply) |
| Capacitive load                           | 100 nF                             |
| Insulation class                          | III                                |
| <b>Outputs</b>                            |                                    |
| Output 1                                  | Switching output or IO-Link mode   |
| Output 2                                  | Analog or switching output         |
| <b>Switching output</b>                   |                                    |
| Communication protocol                    | IO-Link                            |
| Output function                           | NO/NC, PNP/NPN                     |
| Accuracy                                  | ± 0.5 % FS BSL                     |

### Features

- 4-digit, 2-color (red/green), 12-segment display, rotatable by 180°
- Housing is rotatable after mounting the process connection
- Ceramic measuring cell
- 18...33 VDC
- NO/NC contact, PNP/NPN output, analog output (current/voltage), IO-Link
- Process connection G1/4" female thread
- Plug-in device, M12 × 1

### Wiring diagram

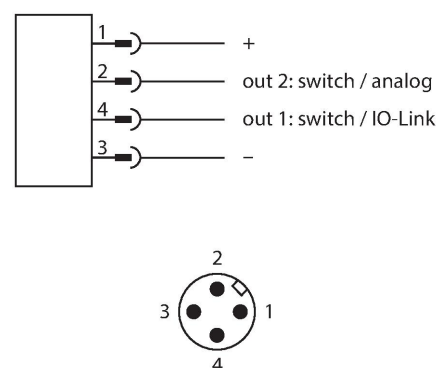

### Functional principle

The pressure transmitters from the PS310 product series operate with ceramic measuring cells. As a result of the pressure acting on the ceramic substrate, a signal that is proportional to the pressure is generated and processed electronically. The processed

## Technical data

|                                |                                                                                                                                                        |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rated operational current      | 0.25 A                                                                                                                                                 |
| Switching frequency            | ≤ 300 Hz                                                                                                                                               |
| Switching point distance       | ≥ 0.5 %                                                                                                                                                |
| Switch point:                  | (Min. + 0.005 × range)...100 % of full scale                                                                                                           |
| Release point(s)               | min. up to (SP - 0.005 × range)                                                                                                                        |
| Switching cycles               | ≥ 100 mil.                                                                                                                                             |
| <b>Analog output</b>           |                                                                                                                                                        |
| Current output                 | 4...20 mA                                                                                                                                              |
| High level signal current      | 20.5 mA                                                                                                                                                |
| Low level signal current       | 3.8 mA                                                                                                                                                 |
| Load resistance current output | ≤ 0.5 kΩ                                                                                                                                               |
| Voltage output                 | 0...10 V                                                                                                                                               |
| Load resistance voltage output | ≥ 8 kΩ                                                                                                                                                 |
| Accuracy LHR                   | ± 0.5 % FS BSL                                                                                                                                         |
| <b>IO-Link</b>                 |                                                                                                                                                        |
| IO-Link specification          | V 1.1                                                                                                                                                  |
| IO-Link port type              | Class A                                                                                                                                                |
| Transmission physics           | corresponds to 3-wire physics (PHY2)                                                                                                                   |
| Transmission rate              | COM 2/38.4 kbps                                                                                                                                        |
| Process data width             | 16 bit                                                                                                                                                 |
| Measured value information     | 14 bit                                                                                                                                                 |
| Switching point information    | 2 bit                                                                                                                                                  |
| Frame type                     | 2.2                                                                                                                                                    |
| Programming                    | FDT/DTM                                                                                                                                                |
| Accuracy                       | ± 0.5 % FS BSL                                                                                                                                         |
| Included in the SIDI GSDML     | Yes                                                                                                                                                    |
| <b>Programming</b>             |                                                                                                                                                        |
| Programming options            | start/end value analog output; switch/release points; PNP/NPN; NO/NC contact; hysteresis/window function; damping; pressure unit; peak pressure memory |
| <b>Mechanical data</b>         |                                                                                                                                                        |
| Housing material               | Stainless-steel/Plastic, 1.4404 (AISI 316L)/Grilamid TR90 UV/Elastollan C 65 A 15 HPM 000/Ultramid A3X2G5                                              |
| Materials (contact with media) | Stainless steel 1.4404 (AISI 316L), Al <sub>2</sub> O <sub>3</sub> , FKM                                                                               |
| Process connection             | G 1/4" female thread                                                                                                                                   |

signal is available either as a switching or an analog output with an accuracy of 0.5 % of full scale. The rotatable sensor body and a variety of process connections guarantee flexible process integration.

## Technical data

|                                                    |                                                                                                                                                                                      |
|----------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Wrench size pressure connection / coupling nut     | 24                                                                                                                                                                                   |
| Max. tightening torque of housing nut              | 35 Nm                                                                                                                                                                                |
| Electrical connection                              | Connector, M12 × 1                                                                                                                                                                   |
| Protection class                                   | IP66<br>IP67<br>IP69K                                                                                                                                                                |
| <b>Environmental conditions</b>                    |                                                                                                                                                                                      |
| Ambient temperature                                | -40...+80 °C                                                                                                                                                                         |
| Storage temperature                                | -40...+80 °C                                                                                                                                                                         |
| Shock resistance                                   | 50 g (11 ms) EN 60068-2-27                                                                                                                                                           |
| EMV                                                | EN 61000-4-2 ESD:4 kV CD / 8 kV AD<br>EN 61000-4-3 HF radiated: 15 V/m<br>EN 61000-4-4 Burst: 2 kV<br>EN 61000-4-6 HF cable bound: 10 V<br>EN 61000-6-2 0.5 kV, 42 Ω<br>EN 61326-2-3 |
| <b>Tests/approvals</b>                             |                                                                                                                                                                                      |
| Approvals                                          | CE<br>Metrological certification (RUS)<br>cULus                                                                                                                                      |
| UL registration number                             | E183243                                                                                                                                                                              |
| <b>Reference conditions acc. to IEC 61298-1</b>    |                                                                                                                                                                                      |
| Temperature                                        | 15...+25 °C                                                                                                                                                                          |
| Atmospheric pressure                               | 860...1030 hPa abs.                                                                                                                                                                  |
| Humidity                                           | 45...75 % rel.                                                                                                                                                                       |
| Auxiliary power                                    | 24 VDC                                                                                                                                                                               |
| <b>Displays/Operating elements</b>                 |                                                                                                                                                                                      |
| Display                                            | 4-digit 12-segment display, rotatable by 180°, red or green                                                                                                                          |
| Switching state                                    | 2 × LEDs, Yellow                                                                                                                                                                     |
| Unit display                                       | 5 × LEDs green (bar, psi, kPa, MPa, misc)                                                                                                                                            |
| <b>Temperature behaviour</b>                       |                                                                                                                                                                                      |
| Temperature coefficient range TK <sub>s</sub>      | ± 0.15 % of full scale/10 K                                                                                                                                                          |
| Temperature coefficient zero point TK <sub>0</sub> | ± 0.15 % of full scale/10 K                                                                                                                                                          |
| MTTF                                               | 100 years acc. to SN 29500 (Ed. 99) 40 °C                                                                                                                                            |