

MALE END VIEW



1 = WHITE/ORANGE (+TX)
2 = WHITE/GREEN (+RX)
3 = ORANGE (−TX)
4 = GREEN (−RX)

euro fast. Ethernet

RJ45S END VIEW




12345678

1 = WHITE/ORANGE (+TX)
2 = ORANGE (−TX)
3 = WHITE/GREEN (+RX)
4 = N/C
5 = N/C
6 = GREEN (−RX)
7 = N/C
8 = N/C

Ethernet

SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR (P1)	TPU OR NYLON (P1), POLYCARBONATE/CLEAR (P2)
MOLDED HEAD MATERIAL/COLOR	TPU/BLUE−GRAY (P1), BLACK (P2)
CONTACT MATERIAL/PLATING (P1)	BRASS/GOLD (P1), BRONZE/GOLD (P2)
COUPLING NUT MATERIAL/PLATING (P1)	BRASS/NICKEL (P1)
RATED CURRENT [A]	1.5 A
RATED VOLTAGE [V]	30 VAC, 42 VDC
OUTER CABLE JACKET MATERIAL/COLOR	TPE/TEAL
CONDUCTOR INSULATION MATERIAL	HDPE
NUMBER OF CONDUCTORS [AWG]	2UTPx24 AWG, SOLID
DRAIN/SHIELD	24 AWG/ALUM. FOIL & TINNED−COPPER BRAIDED
TEMPERATURE RANGE	−40°C to +80°C (−40°F to +176°F)
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K (IP20:RJ45S)

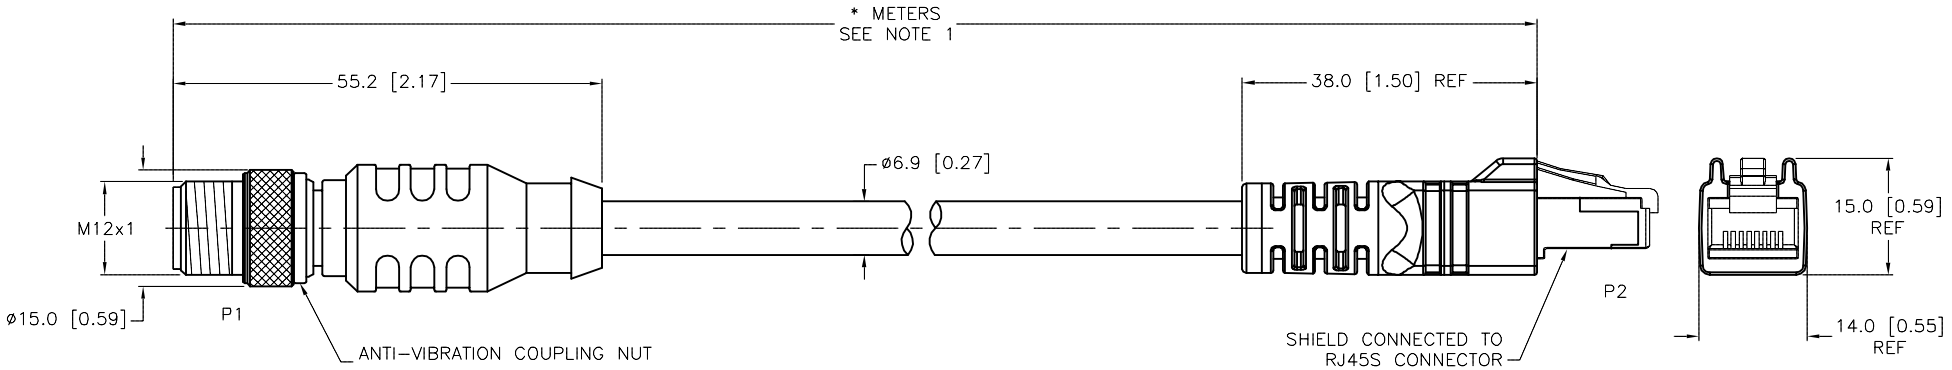

"443" RAW CABLE SPECIFICATIONS	
CABLE PROPERTIES:	OIL, UV, WELD SLAG, AND ABRASION RESISTANT
VOLTAGE RATINGS (MAX):	600V
CATEGORY:	CAT 5e; (CABLE WILL MEET CAT 5e CHANNEL REQUIREMENTS TO 100M LENGTH)
POE COMPLIANT (802.3af):	UP TO 100M LENGTH WHEN INSTALLED PER RECOMMENDATIONS IN TIA TSB−184
APPROVALS:	C(UL)US CM
	COMPLIANT WITH NEC ARTICLE 800 COMMUNICATIONS CABLES

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH − 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	**TOLERANCE***
0−7mm	±0.5mm
8−29mm	±1.0mm
30−49mm	±2.0mm
50−69mm	±3.0mm
70−100mm	±4.0mm
OVER 100mm	±5.0mm
*** UNLESS OTHERWISE SPECIFIED**	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING − FOR REFERENCE ONLY

REV	DESCRIPTION	BY	DATE	ECO NO.
A	DRAWING RELEASE	TV	05/02/16	

RELATED DOCUMENTS
1.
2.
3.
4.

3RD ANGLE PROJECTION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK INC
High Technology Sensors and Automation Controls
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1−800−544−7769
(763) 553−7300
(763) 553−0708 fax
turck.com

MATERIAL: SEE SPECIFICATIONS

FINISH: SEE SPECIFICATIONS

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DRFT: TV | DATE: 04/22/16
APVD: | SCALE: 1=1.0

UNIT OF MEASUREMENT
MILLIMETER [INCH]
DO NOT SCALE THIS DRAWING

DESCRIPTION: RSCD RJ45S 443−*M

IDENTIFICATION NO.:

REV: A

FILE: 777037385

SHEET 1 OF 1