

## MALE END VIEW




1 = YELLOW (+TD)
2 = WHITE (+RD)
3 = ORANGE (−TD)
4 = BLUE (−RD)

## SPECIFICATIONS

| | |
|---|---|
| CONTACT CARRIER MATERIAL | TPU or NYLON |
| MOLDED HEAD MATERIAL/COLOR | TPU/BLACK |
| CONTACT MATERIAL/PLATING | BRASS/GOLD |
| COUPLING NUT MATERIAL/PLATING | BRASS/NICKEL |
| RATED CURRENT [A] | 4.0 A |
| RATED VOLTAGE [V] | 30 VAC/42 VDC |
| OUTER CABLE JACKET MATERIAL/COLOR | PVC/GREEN |
| INNER CABLE JACKET MATERIAL/COLOR | PVC/BLACK |
| CONDUCTOR INSULATION MATERIAL | HDPE |
| NUMBER OF CONDUCTORS [AWG] | 4x22 AWG, SOLID |
| SHIELDING | ALUMINUM/POLYESTER FOIL & T−C BRAIDED |
| TEMPERATURE RANGE | −40°C to +80°C (−22°F to +176°F) |
| PROTECTION CLASS | MEETS NEMA 1,3,4,6P AND IEC IP68 |

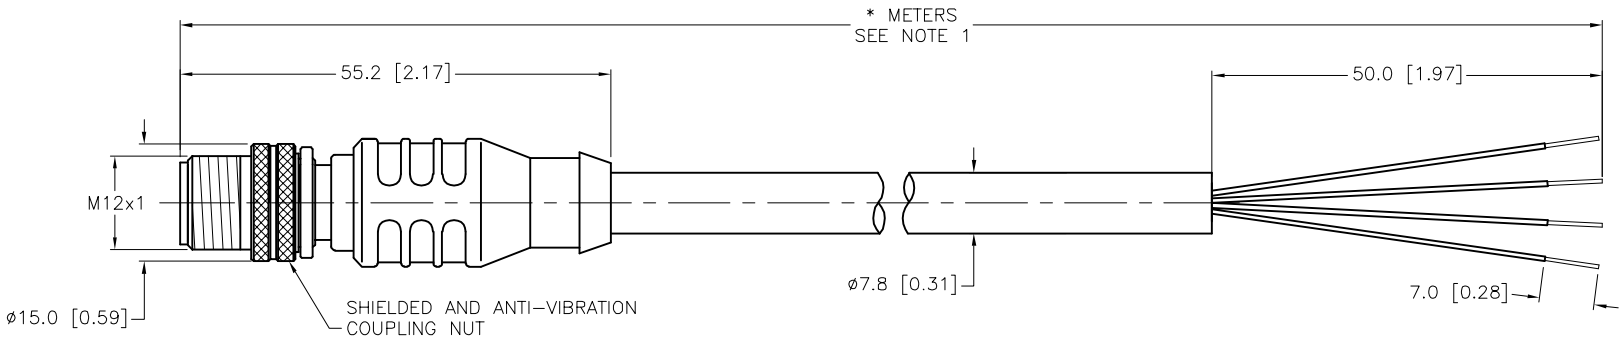


| CABLE LENGTH | TOLERANCE* |
|---|---|
| ALL LENGTHS | + 4% (OR 50mm) OF LENGTH<br>− 0% (OR 0mm) OF LENGTH<br>WHICHEVER IS GREATER |
| **STRIP LENGTH** | **TOLERANCE*** |
| 0−7mm | ±0.5mm |
| 8−29mm | ±1.0mm |
| 30−49mm | ±2.0mm |
| 50−69mm | ±3.0mm |
| 70−100mm | ±4.0mm |
| OVER 100mm | ±5.0mm |
| *** UNLESS OTHERWISE SPECIFIED** | |

**SOURCE DRAWING - FOR REFERENCE ONLY**

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

| REV | DESCRIPTION | BY | DATE | ECO NO. |
|---|---|---|---|---|
| C | UPDATE VOLTAGE | KB | 02/06/24 | 79759 |

RELATED DOCUMENTS
1.
2.
3.
4.

MATERIAL

FINISH

3RD ANGLE PROJECTION

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT KMY | DATE 11/04/11
APVD T.S. | SCALE 1=1.0

UNIT OF MEASUREMENT
**MILLIMETER [ INCH ]**
DO NOT SCALE THIS DRAWING

TURCK
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1−800−544−7769
(763) 553−7300
(763) 553−0708 fax
www.turck.us

DESCRIPTION
RSSD 421−*M

IDENTIFICATION NO.

REV C

FILE: 777028293

SHEET 1 OF 1