

## MALE END VIEW




1 = YELLOW (+TD)
2 = WHITE (+RD)
3 = ORANGE (−TD)
4 = BLUE (−RD)


## FEMALE END VIEW




1 = YELLOW (+TD)
2 = WHITE (+RD)
3 = ORANGE (−TD)
4 = BLUE (−RD)

## SPECIFICATIONS

| | |
|---|---|
| CONTACT CARRIER MATERIAL | TPU |
| MOLDED HEAD MATERIAL/COLOR | TPU/BLACK |
| CONTACT MATERIAL/PLATING | BRASS/GOLD |
| COUPLING NUT MATERIAL/PLATING | BRASS/NICKEL |
| RATED CURRENT [A] | 4.0 A |
| RATED VOLTAGE [V] | 30 VAC/42 VDC |
| OUTER CABLE JACKET MATERIAL/COLOR | TPE/BRIGHT GREEN |
| CONDUCTOR INSULATION MATERIAL | HDPE |
| NUMBER OF CONDUCTORS [AWG] | 4x22 AWG, STRANDED, CAT 5E |
| SHIELDING | ALUM.−POLYESTER FOIL, TINNED−COPPER BRAID |
| TEMPERATURE RANGE | −40°C to +80°C (−40°F to +176°F) |
| PROTECTION CLASS | MEETS IEC IP67 |

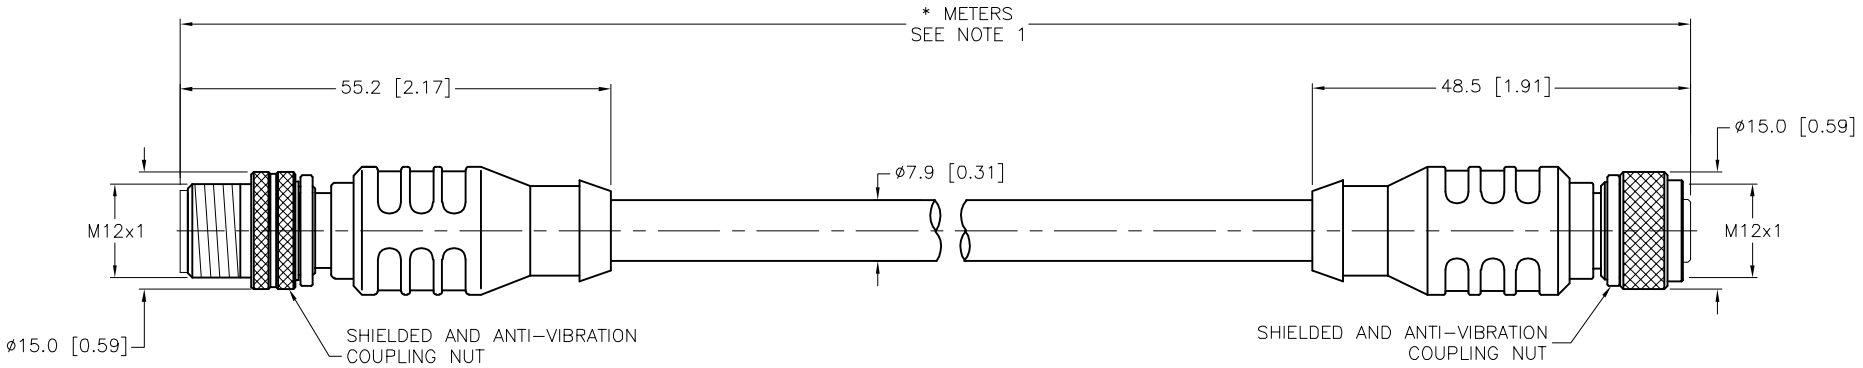


| CABLE LENGTH | TOLERANCE* |
|---|---|
| ALL LENGTHS | + 4% (OR 50mm) OF LENGTH<br>− 0% (OR 0mm) OF LENGTH<br>WHICHEVER IS GREATER |
| **STRIP LENGTH** | **TOLERANCE*** |
| 0−7mm | ±0.5mm |
| 8−29mm | ±1.0mm |
| 30−49mm | ±2.0mm |
| 50−69mm | ±3.0mm |
| 70−100mm | ±4.0mm |
| OVER 100mm | ±5.0mm |
| *** UNLESS OTHERWISE SPECIFIED** | |

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

**SOURCE DRAWING - FOR REFERENCE ONLY**

| REV | DESCRIPTION | BY | DATE | ECO NO. |
|---|---|---|---|---|
| K | UPDATE VOLTAGE, UL | KB | 02/06/24 | 79759 |

RELATED DOCUMENTS
1.
2.
3.
4.

3RD ANGLE PROJECTION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1−800−544−7769
(763) 553−7300
(763) 553−0708 fax
www.turck.us

MATERIAL

FINISH

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DRFT RWC | DATE 11/24/09
APVD | SCALE 1=1.0

UNIT OF MEASUREMENT
**MILLIMETER [ INCH ]**
DO NOT SCALE THIS DRAWING

DESCRIPTION
RSSD RKSD 423−*M

IDENTIFICATION NO.

REV K

FILE: 777025608

SHEET 1 OF 1