

MALE END VIEW



1 = WHITE/ORANGE (+TX)
2 = WHITE/GREEN (+RX)
3 = ORANGE (−TX)
4 = GREEN (−RX)

euro fast. Ethernet

FEMALE END VIEW




1 = WHITE/ORANGE (+TX)
2 = WHITE/GREEN (+RX)
3 = ORANGE (−TX)
4 = GREEN (−RX)

euro fast. Ethernet

SPECIFICATIONS

CONTACT CARRIER MATERIAL	TPU OR NYLON
MOLDED HEAD MATERIAL/COLOR	TPU/BLUE−GRAY
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	0.8 A
RATED VOLTAGE [V]	250 V
OUTER CABLE JACKET MATERIAL/COLOR	TPU/TEAL (HALOGEN−FREE)
CONDUCTOR INSULATION MATERIAL	PE
NUMBER OF CONDUCTORS [AWG]	4x26 AWG, STRANDED, CAT 5e
SHIELDING	ALUM.−POLYESTER FOIL AND T−C BRAIDED
TEMPERATURE RANGE	−40°C to +75°C (−40°F to +167°F)
PROTECTION CLASS	MEETS IEC IP67

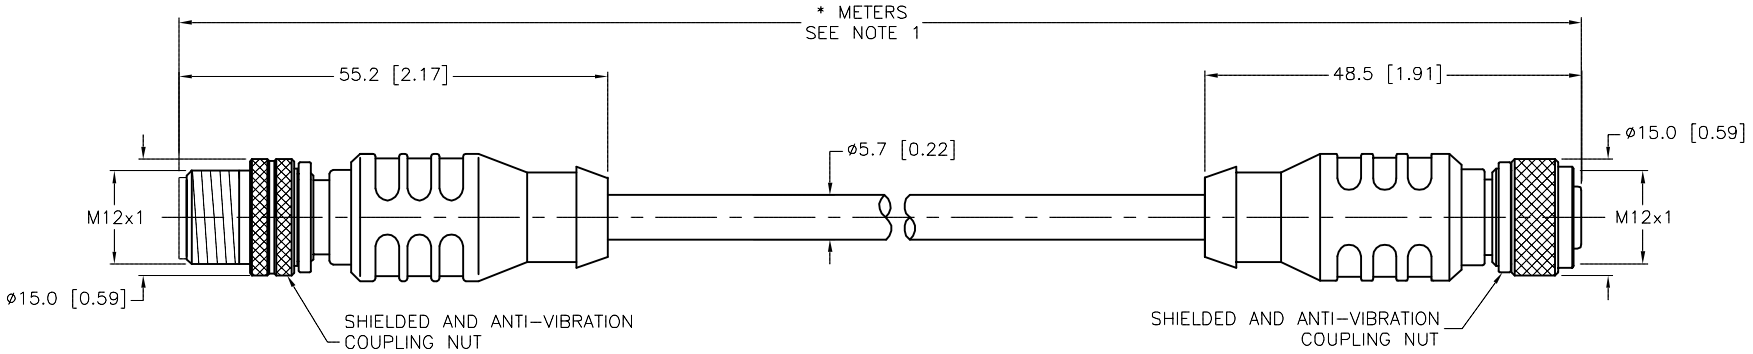

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH − 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	**TOLERANCE***
0−7mm	±0.5mm
8−29mm	±1.0mm
30−49mm	±2.0mm
50−69mm	±3.0mm
70−100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1."*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. MULTIPROTOCOL AND ETHERCAT COMPATIBLE

SOURCE DRAWING − FOR REFERENCE ONLY

REV	DESCRIPTION	BY	DATE	ECO NO.
G	ADD NOTE 2	RDS	10/19/15	51998

RELATED DOCUMENTS
1.
2.
3.
4.

MATERIAL

FINISH

3RD ANGLE PROJECTION

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK INC
High Technology Sensors and Automation Controls
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1−800−544−7769
(763) 553−7300
(763) 553−0708 fax
turck.com

DRFT KMY | DATE 10/20/11
APVD A.A. | SCALE 1=1.0

UNIT OF MEASUREMENT
MILLIMETER [INCH]
DO NOT SCALE THIS DRAWING

DESCRIPTION
RSSD RKSD 4413−*M

IDENTIFICATION NO.

REV G

FILE: 777028223 | SHEET 1 OF 1

Approved 10/23/2015, work order #90095 by A.A.