

## MALE END VIEW




1 = WHITE/ORANGE (+TX)
2 = WHITE/GREEN (+RX)
3 = ORANGE (−TX)
4 = GREEN/WHITE (−RX)

euro fast. Ethernet

## FEMALE END VIEW





1 = WHITE/ORANGE (+TX)
2 = WHITE/GREEN (+RX)
3 = ORANGE (−TX)
4 = GREEN/WHITE (−RX)

euro fast. Ethernet

## SPECIFICATIONS

| | |
|---|---|
| CONTACT CARRIER MATERIAL | TPU |
| MOLDED HEAD MATERIAL/COLOR | TPU/BLUE−GRAY |
| CONTACT MATERIAL/PLATING | BRASS/GOLD |
| COUPLING NUT MATERIAL/FINISH | STAINLESS STEEL/PASSIVATED |
| RATED CURRENT [A] | 4.0 A |
| RATED VOLTAGE [V] | 250 V |
| OUTER CABLE JACKET MATERIAL/COLOR | TPE/TEAL |
| CONDUCTOR INSULATION MATERIAL | HDPE |
| NUMBER OF CONDUCTORS [AWG] | 4x22 AWG, STRANDED, CAT 5e |
| SHIELDING | ALUM.−POLYESTER FOIL & T−C BRAIDED |
| TEMPERATURE RANGE | −40°C to +80°C (−40°F to +176°F) |
| PROTECTION CLASS | MEETS IEC IP67 |
| CABLE ATTRIBUTES | UL: PLTC 75 or AWM 80C/600V |

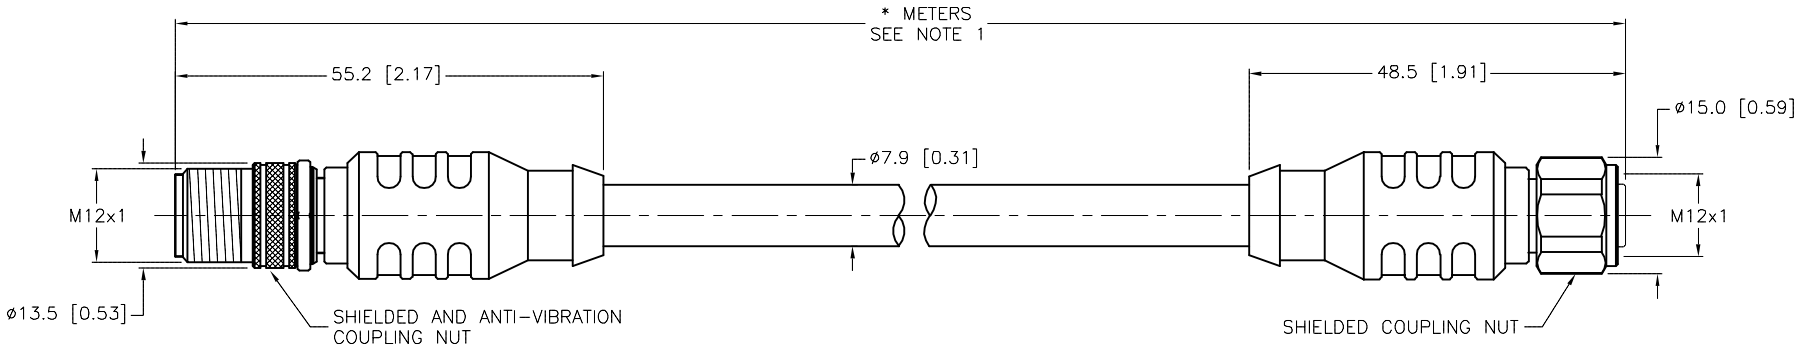


| CABLE LENGTH | TOLERANCE* |
|---|---|
| ALL LENGTHS | + 4% (OR 50mm) OF LENGTH<br>− 0% (OR 0mm) OF LENGTH<br>WHICHEVER IS GREATER |
| **STRIP LENGTH** | **TOLERANCE*** |
| 0−7mm | ±0.5mm |
| 8−29mm | ±1.0mm |
| 30−49mm | ±2.0mm |
| 50−69mm | ±3.0mm |
| 70−100mm | ±4.0mm |
| OVER 100mm | ±5.0mm |
| *** UNLESS OTHERWISE SPECIFIED** | |

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

**SOURCE DRAWING - FOR REFERENCE ONLY**

| REV | DESCRIPTION | BY | DATE | ECO NO. |
|---|---|---|---|---|
| B | UPDATE CABLE OD | NF | 04/17/18 | 64398 |

RELATED DOCUMENTS
1.
2.
3.
4.

MATERIAL

FINISH

3RD ANGLE PROJECTION

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1−800−544−7769
(763) 553−7300
(763) 553−0708 fax
www.turck.us

DRFT TV | DATE 07/08/15
APVD L.H. | SCALE 1=1.0

UNIT OF MEASUREMENT
**MILLIMETER [ INCH ]**
DO NOT SCALE THIS DRAWING

DESCRIPTION
RSSDV RKSDV 444−*M

IDENTIFICATION NO.

REV B

FILE: 777035704 | SHEET 1 OF 1

Approved 04/20/2018, work order #162014 by L.S.