
MALE END VIEW



1 = WHITE/BLUE
2 = WHITE/BROWN
3 = BROWN
4 = ORANGE (−TX)
5 = WHITE/GREEN (+RX)
6 = WHITE/ORANGE (+TX)
7 = BLUE
8 = GREEN (−RX)

RJ45 END VIEW




12345678

1 = WHITE/ORANGE (+TX)
2 = ORANGE (−TX)
3 = WHITE/GREEN (+RX)
4 = BLUE
5 = WHITE/BLUE
6 = GREEN (−RX)
7 = WHITE/BROWN
8 = BROWN

SPECIFICATIONS

CONTACT CARRIER MATERIAL (P1)	NYLON OR TPU
MOLDED HEAD MATERIAL/COLOR (P1)	TPU/BLACK
CONTACT MATERIAL/PLATING (P1)	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING (P1)	BRASS/NICKEL
CONTACT CARRIER MATERIAL/COLOR (P2)	POLYCARBONATE/CLEAR
MOLDED HEAD MATERIAL/COLOR (P2)	TPU/BLACK
CONTACT MATERIAL/PLATING (P2)	BRONZE/GOLD
RATED CURRENT [A]	1.5 A
RATED VOLTAGE [V]	42 V
OUTER CABLE JACKET MATERIAL/COLOR	TPE/TEAL
CONDUCTOR INSULATION MATERIAL	HDPE
NUMBER OF CONDUCTORS [AWG]	8x24 AWG, STRANDED, CAT 5e
SHIELDING	ALUM.−POLYESTER FOIL, TINNED−COPPER BRAID
TEMPERATURE RANGE	−40°C to +80°C (−40°F to +176°F)
PROTECTION CLASS (P1)	MEETS IEC IP67 (RJ45:IP20)

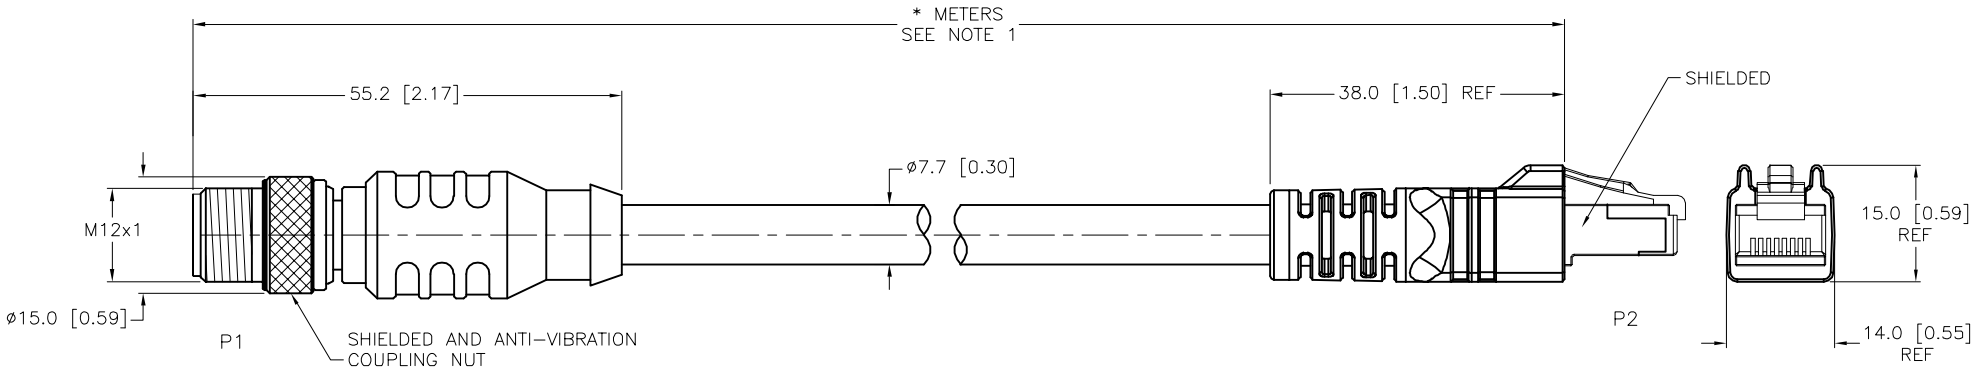

CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH − 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	**TOLERANCE ***
0−7mm	±0.5mm
8−29mm	±1.0mm
30−49mm	±2.0mm
50−69mm	±3.0mm
70−100mm	±4.0mm
OVER 100mm	±5.0mm
*UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/CS14323" DESIGNATES PRIOR TO OVERMOLD, POT SHIELD SLEEVE.

SOURCE DRAWING - FOR REFERENCE ONLY

REV	DESCRIPTION	BY	DATE	ECO NO.
C	UPDATED "/CS" DESCRIPTION PER ECO	TV	06/14/17	60140

RELATED DOCUMENTS
1.
2.
3.
4.

3RD ANGLE PROJECTION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1−800−544−7769
(763) 553−7300
(763) 553−0708 fax
www.turck.us

MATERIAL

FINISH

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DRFT KMY | DATE 12/26/13
APVD A.A. | SCALE 1=1.0

UNIT OF MEASUREMENT
MILLIMETER [INCH]
DO NOT SCALE THIS DRAWING

DESCRIPTION
RSS RJ45S 841−*M/CS14323

IDENTIFICATION NO.

REV C

FILE: 777032693

SHEET 1 OF 1