

MALE END VIEW



1 = WHITE/BLUE
2 = WHITE/BROWN
3 = BROWN
4 = ORANGE (−TX)
5 = WHITE/GREEN (+RX)
6 = WHITE/ORANGE (+TX)
7 = BLUE
8 = GREEN (−RX)

euro fast. Ethernet

RJ45S END VIEW




12345678

1 = WHITE/ORANGE (+TX)
2 = ORANGE (−TX)
3 = WHITE/GREEN (+RX)
4 = BLUE
5 = WHITE/BLUE
6 = GREEN (−RX)
7 = WHITE/BROWN
8 = BROWN

Ethernet

SPECIFICATIONS

CONTACT CARRIER MATERIAL (P1)	NYLON OR TPU
MOLDED HEAD MATERIAL/COLOR (P1)	TPU/BLACK
CONTACT MATERIAL/PLATING (P1)	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING (P1)	BRASS/NICKEL
CONTACT CARRIER MATERIAL (P2)	POLYCARBONATE
MOLDED HEAD MATERIAL/COLOR (P2)	TPU/BLACK
CONTACT MATERIAL/PLATING (P2)	BRONZE/GOLD
RATED CURRENT [A]	1.5 A
RATED VOLTAGE [V]	42 V
OUTER CABLE JACKET MATERIAL/COLOR	TPE/TEAL
CONDUCTOR INSULATION MATERIAL	HDPE
NUMBER OF CONDUCTORS [AWG]	4UTPx24 AWG, SOLID
DRAIN/SHIELD	24 AWG/ALUM.−POLYESTER FOIL, T−C BRAIDED
TEMPERATURE RANGE	−40°C to +80°C (−40°F to +176°F)
PROTECTION CLASS (P1)	MEETS IEC IP67 (RJ45:IP20)

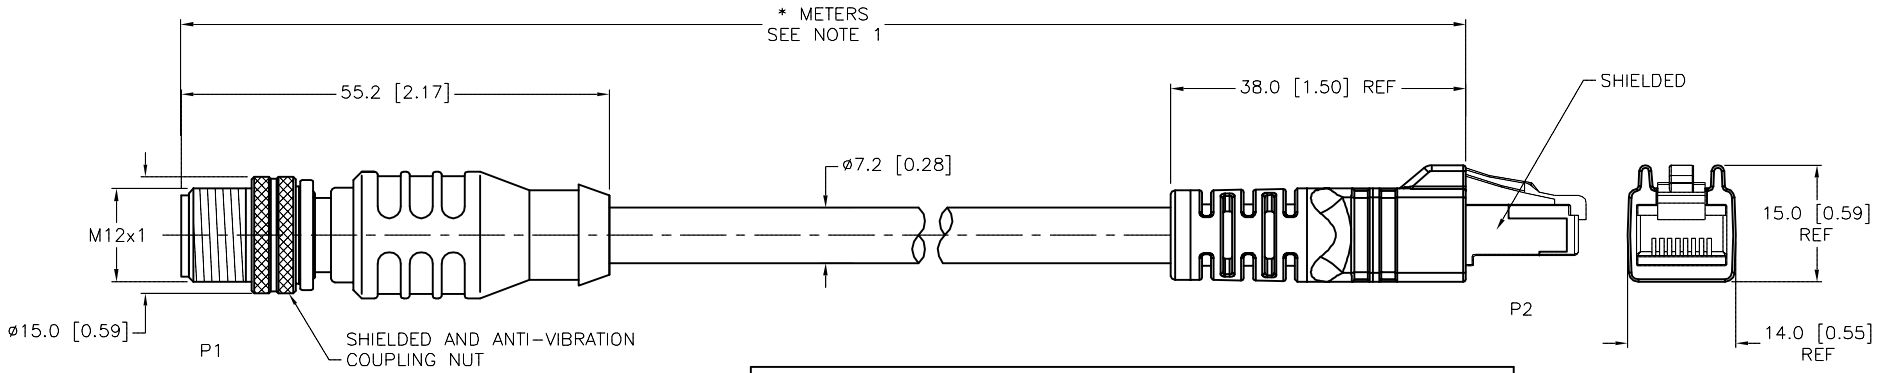

CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH − 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	**TOLERANCE ***
0−7mm	±0.5mm
8−29mm	±1.0mm
30−49mm	±2.0mm
50−69mm	±3.0mm
70−100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

"843" RAW CABLE SPECIFICATIONS

CABLE PROPERTIES:	OIL, UV, WELD SLAG, AND ABRASION RESISTANT
VOLTAGE RATINGS (MAX):	600V
CATEGORY:	CAT 5e
APPROVALS:	C(UL)US CM
	COMPLIANT WITH NEC ARTICLE 800 COMMUNICATIONS CABLES

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/C1195" DESIGNATES PERFORMANCE TESTING USING A FLUKE CABLE ANALYZER. TEST RESULT INCLUDED IN PACKAGING.

REV	DESCRIPTION	BY	DATE	ECO NO.
K	ADD CABLE SPECIFICATIONS	KMY	08/08/14	46546

RELATED DOCUMENTS
1.
2.
3.
4.

MATERIAL

FINISH

3RD ANGLE PROJECTION

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT RDS | DATE 5/19/05
APVD | SCALE 1=1.0

UNIT OF MEASUREMENT
MILLIMETER [INCH]
DO NOT SCALE THIS DRAWING

TURCK
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1−800−544−7769
(763) 553−7300
(763) 553−0708 fax
www.turck.us

DESCRIPTION
RSS RJ45S 843−*M/C1195

IDENTIFICATION NO.

REV
K

FILE: 777006970

SHEET 1 OF 1