

Accessories
Smart Plug
Rotation Speed Monitor
SPF1-AP6X

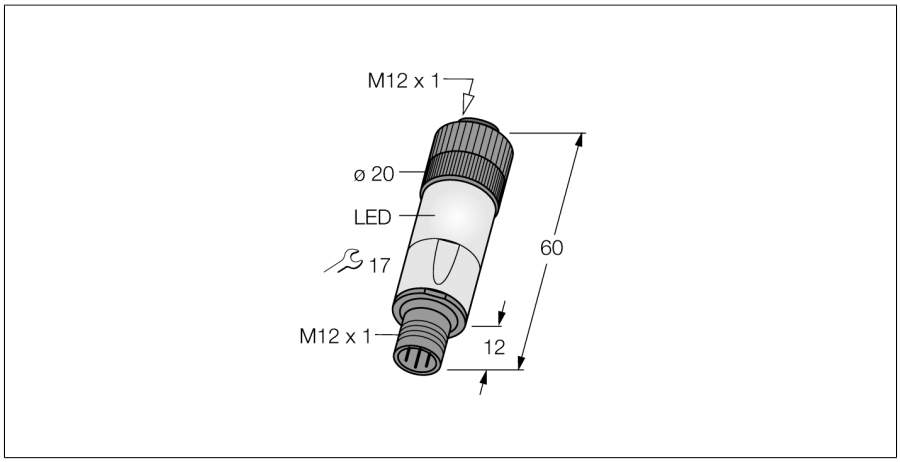

- multifunctional adapter for connection to standard sensors
- Degree of protection IP67
- 4-pin M12 x 1, female connector
- 4-pin M12 x 1, male connector

Wiring Diagram

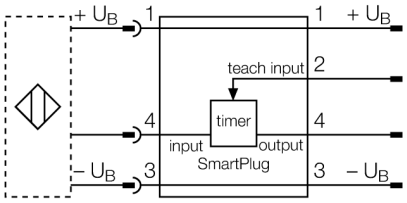


Type	SPF1-AP6X
ID	A0622
Operating voltage U_B	10…30 VDC
Output function	4-wire
Insulation class	⧈
Dimensions	60 mm
Housing material	Plastic, PBTP
Ambient temperature	0…+60 °C
Protection class	IP67

Functional principle

The SmartPlug SPF1-AP6X monitors the frequency of incoming signals. Should the actual frequency be 5% below the programmed frequency, the output of the SmartPlug is activated.

Edition • 2025-02-28T15:36:23+01:00

Function accessories

Type code	Ident-No.		Dimension drawing
VB2-SP1	A3501-29	Teach adapter	

Edition • 2025-02-28T15:36:23+01:00