
SPECIFICATIONS	
OPERATING TEMPERATURE	−50°C to +350°C (−58°F to +662°F)
HOUSING MATERIAL	SST, A4 1.4404 (AISI 316L)
SEALING MATERIAL	SST
PRESSURE RESISTANCE	100 BAR
MECHANICAL CONNECTION	1/2 NPT
HOUSING NUT TIGHTENING TORQUE	100 Nm MAX.

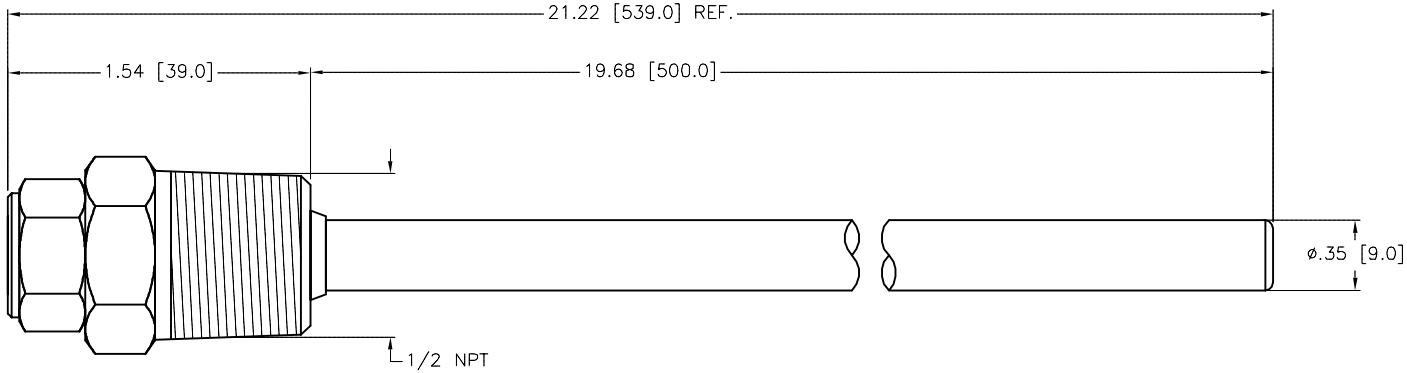

SOURCE DRAWING - FOR REFERENCE ONLY

REV	DESCRIPTION	BY	DATE	ECO NO.
A	DRAWING RELEASE	RDS	03/11/13	

RELATED DOCUMENTS
1.
2.
3.
4.

3RD ANGLE PROJECTION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK INC
High Technology Sensors and Automation Controls
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
turck.com

MATERIAL

FINISH

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DRFT RDS | DATE 03/11/13
APVD K.H. | SCALE 1=1.0

UNIT OF MEASUREMENT
INCH [MILLIMETER]
DO NOT SCALE THIS DRAWING

DESCRIPTION
THW-6-N1/2-A4-L500

IDENTIFICATION NO. M9910497 | REV A

FILE: M9910497 | SHEET 1 OF 1

Approved 03/11/2013, work order #39554 by K.H.