
| SPECIFICATIONS | |
|---|---|
| OPERATING TEMPERATURE | −50°C to +350°C (−58°F to +662°F) |
| HOUSING MATERIAL | SST, A4 1.4404 (AISI 316L) |
| SEALING MATERIAL | SST, A4 1.4404 (AISI 316L) |
| PRESSURE RESISTANCE | 150 PSI |
| MECHANICAL CONNECTION | 9/16−18 SAE |
| HOUSING NUT TIGHTENING TORQUE | 100 Nm MAX. |

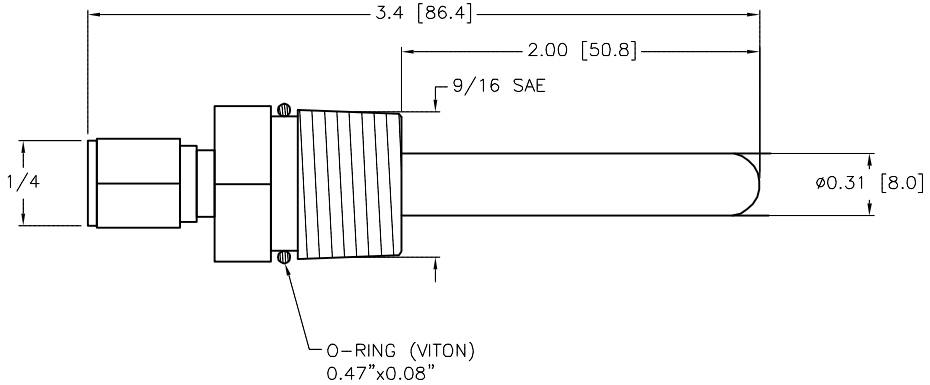


**SOURCE DRAWING - FOR REFERENCE ONLY**

| REV | DESCRIPTION | BY | DATE | ECO NO. |
|---|---|---|---|---|
| A | DRAWING RELEASE | TV | 04/25/16 | |

RELATED DOCUMENTS
1.
2.
3.
4.

3RD ANGLE PROJECTION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK INC
High Technology Sensors and Automation Controls
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1−800−544−7769
(763) 553−7300
(763) 553−0708 fax
turck.com

MATERIAL
SEE SPECIFICATIONS

FINISH

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DRFT TV | DATE 04/25/16
APVD N.J. | SCALE 1=1.0

UNIT OF MEASUREMENT
**INCH [ MILLIMETER ]**
DO NOT SCALE THIS DRAWING

DESCRIPTION
THW−6−S9/16−A4−L050

IDENTIFICATION NO. A900043 | REV A

FILE: A900043 | SHEET 1 OF 1

Approved 04/25/2016, work order #103515 by N.J.