

MALE END VIEW



1 = WHITE/BLUE
2 = WHITE/BROWN
3 = BROWN
4 = ORANGE (−TX)
5 = WHITE/GREEN (+RX)
6 = WHITE/ORANGE (+TX)
7 = BLUE
8 = GREEN (−RX)

RJ45S END VIEW





12345678

1 = WHITE/ORANGE (+TX)
2 = ORANGE (−TX)
3 = WHITE/GREEN (+RX)
4 = BLUE
5 = WHITE/BLUE
6 = GREEN (−RX)
7 = WHITE/BROWN
8 = BROWN

SPECIFICATIONS

CONTACT CARRIER MATERIAL (P1)	TPU
MOLDED HEAD MATERIAL/COLOR (P1.P2)	TPU/BLACK
CONTACT MATERIAL/PLATING (P1)	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING (P1)	BRASS/NICKEL
CONTACT CARRIER MATERIAL (P2)	POLYCARBONATE
CONTACT MATERIAL/PLATING (P2)	BRONZE/GOLD
RATED CURRENT [A]	1.5 A
RATED VOLTAGE [V]	42 V
OUTER CABLE JACKET MATERIAL/COLOR	TPU/TEAL (HALOGEN FREE)
CONDUCTOR INSULATION MATERIAL	OLEFIN
NUMBER OF CONDUCTORS [AWG]	8x26 AWG, STRANDED, CAT 5e
SHIELDING	TINNED−COPPER BRAID
TEMPERATURE RANGE	−40°C to +50°C (−40°F to +122°F)
PROTECTION CLASS	MEETS IEC IP67 (RJ45:IP20)

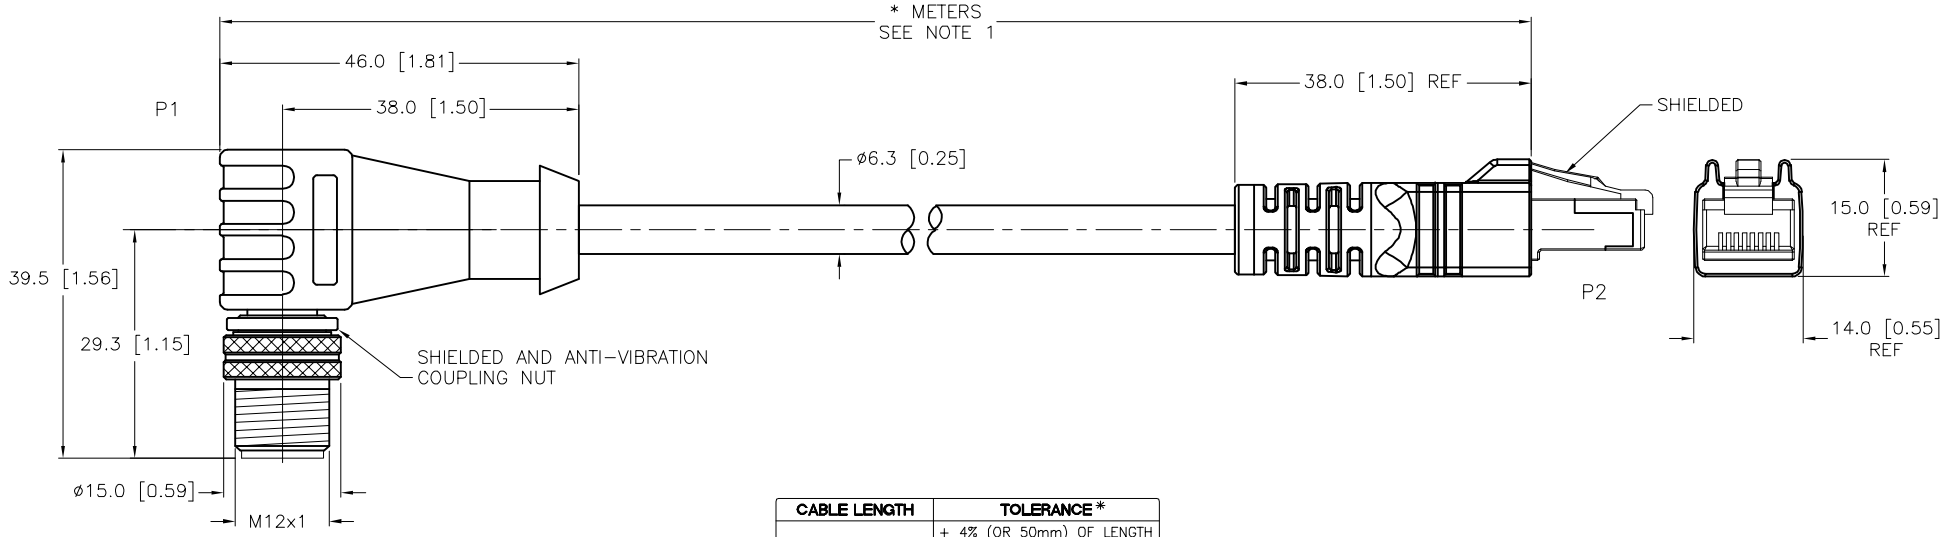

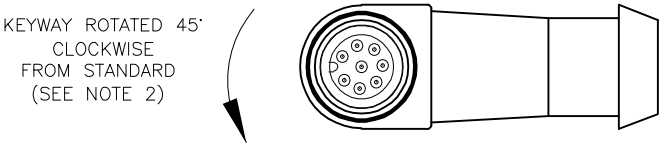

CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH − 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	**TOLERANCE ***
0−7mm	±0.5mm
8−29mm	±1.0mm
30−49mm	±2.0mm
50−69mm	±3.0mm
70−100mm	±4.0mm
OVER 100mm	±5.0mm
*UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING − FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/S1302" DESIGNATES KEYWAY ROTATED 45 DEGREES COUNTER−CLOCKWISE FROM STANDARD FOR A RIGHT−ANGLE MALE EUROFAST CONNECTOR.

REV	DESCRIPTION	BY	DATE	ECO NO.
B	UPDATED P1	AS	06/11/25	500000011277

RELATED DOCUMENTS
1.
2.
3.
4.

MATERIAL

FINISH

3RD ANGLE PROJECTION

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT KMY
APVD C.K.
DATE 06/02/14
SCALE 1=1.0

UNIT OF MEASUREMENT
MILLIMETER [INCH]
DO NOT SCALE THIS DRAWING

TURCK
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1−800−544−7769
(763) 553−7300
(763) 553−0708 fax
www.turck.us

DESCRIPTION
WSS RJ45S 845−*M/S1302

IDENTIFICATION NO.

REV
B

FILE: 777033508

SHEET 1 OF 1