

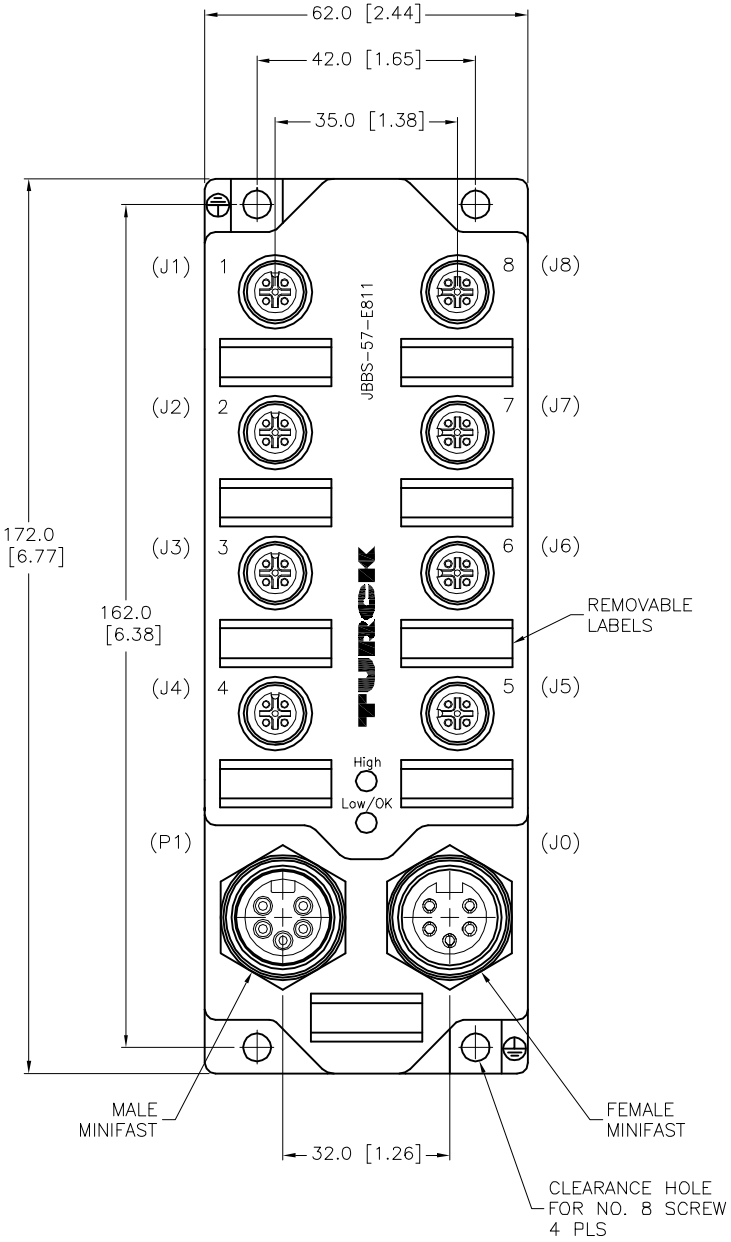


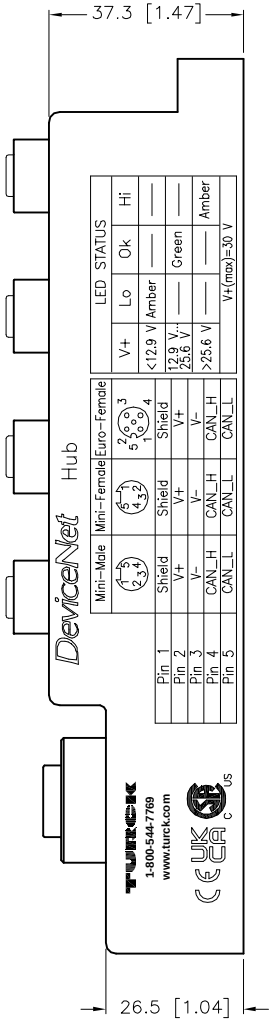


SPECIFICATIONS	
HOUSING MATERIAL	PA 6 (NYLON)
HOUSING FINISH/COLOR	BLUE GREY
RECEPTACLE HOUSING	NICKEL-PLATED BRASS
CONTACT CARRIERS/COLOR	TPU/BLUE-GRAY
CONTACTS	GOLD-PLATED BRASS
OPERATING VOLTAGE	300 V
OPERATING CURRENT	9.0 A (MINIFAST), 4.0 A (EUROFAST)
PROTECTION CLASS	NEMA 1,3,4,6P AND IP67 - ONLY WHEN ALL RECEPT. COVERED W/ PLUGS OR CONNECTED
OPERATING TEMPERATURE	-25°C to +70°C (-13°F to +158°F)
LED FUCTION	(2) POWER LEDs: 1 AMBER (LO)<12.9 V 1 GN (OK) 12.9V-25.6V, 2 AMBER (HI)>25.6V

PIN-OUT DIAGRAM

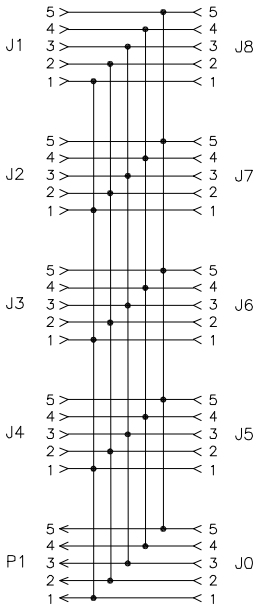


FEMALE END VIEW (J0)




1. DRAIN
2. V+
3. V-
4. CAN_H
5. CAN_L

MALE END VIEW (P1)



1. DRAIN
2. V+
3. V-
4. CAN_H
5. CAN_L

FEMALE END VIEW (J1-J8)



1. DRAIN
2. V+
3. V-
4. CAN_H
5. CAN_L

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us
1. 2. 3. 4.				
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DRFT IK; DATE 5/17/99 APVD GC; SCALE 1=1.5 UNIT OF MEASUREMENT **MILLIMETER [INCH]** DO NOT SCALE THIS DRAWING	DESCRIPTION: JBBS-57-E811 IDENTIFICATION NO.: U0205 REV: N FILE: U0205 SHEET 1 OF 1	
FINISH				

REV	DESCRIPTION	BY	DATE	ECO NO.
N	UPDATED DRAWING	AS	03/17/26	81744