

## MALE END VIEW




1 = WHITE/BLUE
2 = WHITE/BROWN
3 = BROWN
4 = ORANGE (−TX)
5 = WHITE/GREEN (+RX)
6 = WHITE/ORANGE (+TX)
7 = BLUE
8 = GREEN (−RX)

euro fast. Ethernet

## FEMALE END VIEW





1 = WHITE/BLUE
2 = WHITE/BROWN
3 = BROWN
4 = ORANGE (−TX)
5 = WHITE/GREEN (+RX)
6 = WHITE/ORANGE (+TX)
7 = BLUE
8 = GREEN (−RX)

euro fast. Ethernet

## SPECIFICATIONS

| | |
|---|---|
| CONTACT CARRIER MATERIAL | TPU |
| MOLDED HEAD MATERIAL/COLOR | TPU/BLACK |
| CONTACT MATERIAL/PLATING | BRASS/GOLD |
| COUPLING NUT MATERIAL/PLATING | BRASS/NICKEL |
| RATED CURRENT [A] | 1.0 A |
| RATED VOLTAGE [V] | 60 V |
| OUTER CABLE JACKET MATERIAL/COLOR | TPU/TEAL (HALOGEN FREE) |
| CONDUCTOR INSULATION MATERIAL | OLEFIN |
| NUMBER OF CONDUCTORS [AWG] | 8x26 AWG, STRANDED, CAT 5e |
| SHIELD | TINNED−COPPER BRAID |
| TEMPERATURE RANGE | −40°C to +50°C (−40°F to +122°F) |
| PROTECTION CLASS | MEETS IEC IP67 |

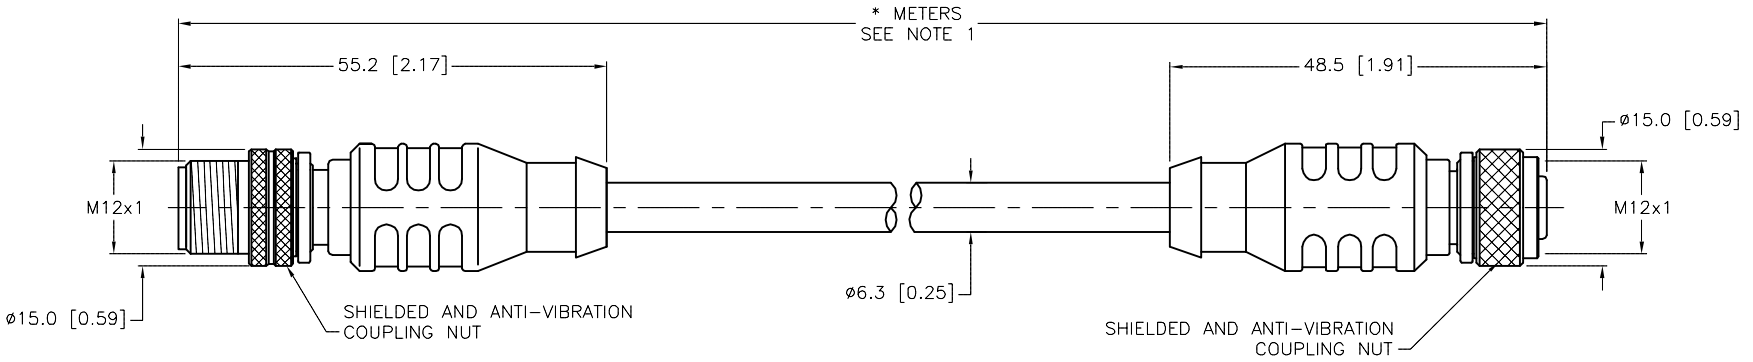


| CABLE LENGTH | TOLERANCE * |
|---|---|
| ALL LENGTHS | + 4% (OR 50mm) OF LENGTH<br>− 0% (OR 0mm) OF LENGTH<br>WHICHEVER IS GREATER |
| **STRIP LENGTH** | **TOLERANCE *** |
| 0−7mm | ±0.5mm |
| 8−29mm | ±1.0mm |
| 30−49mm | ±2.0mm |
| 50−69mm | ±3.0mm |
| 70−100mm | ±4.0mm |
| OVER 100mm | ±5.0mm |
| * UNLESS OTHERWISE SPECIFIED | |

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

**SOURCE DRAWING − FOR REFERENCE ONLY**

| REV | DESCRIPTION | BY | DATE | ECO NO. |
|---|---|---|---|---|
| I | UPDATE RATED CURRENT SPECIFICATION | KMY | 01/27/14 | 44548 |

RELATED DOCUMENTS
1.
2.
3.
4.

MATERIAL

FINISH

3RD ANGLE PROJECTION

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT RDS | DATE 03/31/05
APVD | SCALE 1=1.0

UNIT OF MEASUREMENT
**MILLIMETER [ INCH ]**
DO NOT SCALE THIS DRAWING

TURCK
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1−800−544−7769
(763) 553−7300
(763) 553−0708 fax
www.turck.us

DESCRIPTION: RSS RKS 845−*M

IDENTIFICATION NO.

REV: I

FILE: 777006921

SHEET 1 OF 1