
MALE END VIEW



1 = GREEN (SHIELD)
2 = BROWN (+ VOLTAGE)
3 = WHITE/GREEN (– VOLTAGE)
WHITE/BROWN (– VOLTAGE)
4 = (WHITE/ORANGE CAN_H)
5 = ORANGE (CAN_L)

euro fast. CANopen


RJ45S END VIEW



12345678


1 = WHITE/ORANGE (CAN_H)
2 = ORANGE (CAN_L)
3 = WHITE/GREEN (CAN_GND)
4 = N/C
5 = N/C
6 = GREEN (CAN_SHLD)
7 = WHITE/BROWN (CAN_GND)
8 = BROWN (CAN_V+)

WIRING DIAGRAM

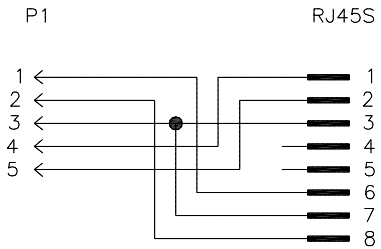

SPECIFICATIONS

CONTACT CARRIER MATERIAL (P1)	TPU OR NYLON
MOLDED HEAD MATERIAL/COLOR (P1)	TPU/BLUE–GRAY
CONTACT MATERIAL/PLATING (P1)	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING (P1)	BRASS/NICKEL
CONTACT CARRIER MATERIAL/COLOR (RJ45S)	POLYCARBONATE/CLEAR
MOLDED HEAD MATERIAL/COLOR (RJ45S)	TPU/BLUE–GRAY
CONTACT MATERIAL/PLATING (RJ45S)	BRONZE/GOLD
RATED CURRENT [A]	1.5 A
RATED VOLTAGE [V]	42 V
OUTER CABLE JACKET MATERIAL/COLOR	TPE/TEAL
CONDUCTOR INSULATION MATERIAL	HDPE
NUMBER OF CONDUCTORS [AWG]	8x24 AWG, STRANDED, CAT 5E
SHIELDING	ALUM./POLYESTER FOIL & TINNED COPPER BRAID
TEMPERATURE RANGE	–40°C to +80°C (–40°F to +176°F)
PROTECTION CLASS (P1)	MEETS NEMA 1,3,4,6P AND IEC IP68 (RJ45:IP20)

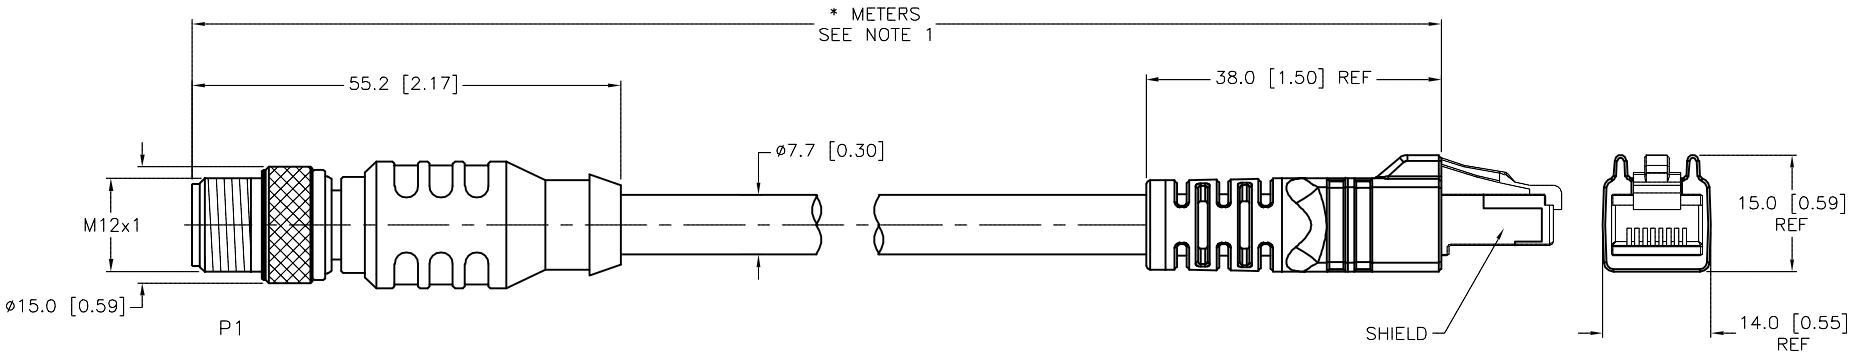

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH – 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	**TOLERANCE***
0–7mm	±0.5mm
8–29mm	±1.0mm
30–49mm	±2.0mm
50–69mm	±3.0mm
70–100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING – FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

REV	DESCRIPTION	BY	DATE	ECO NO.
D	UPDATE CABLE SPECIFICATIONS	RDS	03/15/13	40289

RELATED DOCUMENTS
1.
2.
3.
4.

3RD ANGLE PROJECTION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1–800–544–7769
(763) 553–7300
(763) 553–0708 fax
www.turck.us

MATERIAL: SEE SPECIFICATIONS

FINISH: SEE SPECIFICATIONS

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DRFT: RWC | DATE: 09/30/09
APVD: | SCALE: 1=1.0

UNIT OF MEASUREMENT
MILLIMETER [INCH]
DO NOT SCALE THIS DRAWING

DESCRIPTION: RSC RJ45S 5733–*M

IDENTIFICATION NO.:

REV: D

FILE: 777025954

SHEET 1 OF 1

Approved 04/27/2018, work order #162156 by J.S.